

NITECORE® T5s User Manual

Your Ideal Lighting Solution

Features

- High-grade 304 stainless steel construction
- Compact and portable
- High efficiency digital driver circuit
- Maximum runtime of 28 hours in low mode
- Three levels of brightness plus warning signal
- Constant current (not PWM)
- Convenient one-handed operation
- Reverse polarity protection
- Removable stainless steel clip included
- Lightweight design - only 19g(0.67oz) (without battery)

FL1 STANDARD	HIGH	MID	LOW
	65 LUMENS	25 LUMENS	2.5 LUMENS
	1h 30min	3h 30min	28h
	24m (Beam Distance)		
	150cd (Peak Beam Intensity)		
	1.5m (Impact Resistant)		
	IPX-8, 2m (Waterproof AND Submersible)		

Specifications

LED: CREE XP-G (R5)

Maximum output: 65 lumens

Battery: One AAA battery

Aluminum reflector ensures a balanced beam profile

Toughened ultra-clear mineral glass with anti-reflective coating

Constructed from high-grade 304 stainless steel

Function selection via rotating head


Waterproof in accordance with IPX-8 standard (two meters)

This product has attained European CE and RoHS certification

Operating instructions

Battery installation

Unscrew the head from the flashlight body. Insert one AAA battery with the positive pole (+) pointing to the flashlight head. Replace the flashlight head.

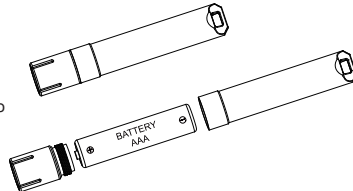

NOTICE

Stated output and runtime has been measured in accordance with the international flashlight testing standards ANSI/NEMA FL1 using a single AAA battery under laboratory conditions. The data may vary in real-world use depending on battery choice, personal usage habits and environmental factors.

Dimensions

Length: 73mm (2.87") Diameter: 12.5mm (0.49")

Weight: 19g (0.67oz) (without battery)

ON/OFF

Turn ON: Rotate the head of the flashlight in a clockwise direction to turn it on.

Turn OFF: Rotate the head of the flashlight in a counter-clockwise direction to turn it off.

Functions selection

With the light turned on, quickly turn it off and then on again within one second to select one of the following functions: "High-Mid-Low-Warning Signal". Repeat the process to move to the next mode.

Maintenance

Clean the threads twice a year with a clean cloth and coat with silicone grease.

Battery Specifications

	Type	Nominal Voltage	Usability
Non-rechargeable Battery (Alkaline)	AAA	1.5V	YES
Non-rechargeable Battery (Lithium)	AAA	1.5V	YES
Rechargeable Battery (Ni-MH/NiCd)	AAA	1.2V	YES
Rechargeable Battery (Li-ion)	10440	3.7V	NO

Warranty Service

NITECORE® flashlights enjoy a worldwide warranty service. Within 14 days of purchase, any defective lights will be offered free replacement (proof of purchase required) by NITECORE® distributors unconditionally; Within 18 months of receipt, NITECORE® offers a free repair service, except for damages caused by misuse. As to claims exceeding 18 months, NITECORE® will continue to warrant the product with the cost of parts to be borne by the customer. Customers may contact their local distributor or NITECORE® directly for warranty repair queries. Please note warranty is voided by the following:

1. Damage caused by disassembly or modification without permission
2. Damage caused to the appearance of the product by misuse or accidental occurrence (such as drops or impacts)
3. Damage caused by incorrect battery insertion (reverse polarity) or battery leakage

For the latest information on NITECORE® products and services, please contact your national NITECORE® distributor or visit our official website: www.NITECORE.com

Thanks for purchasing NITECORE!

SYSMAX Ind.

SYSMAX Industry Co., Ltd.
Rm 1407-08, Glorious Tower, 850 Dongfeng Road East, Yuexiu District, Guangzhou, Guangdong, China 510600
Tel: +86 20 83862000
Fax: +86 20 83882723
E-mail: info@nitecore.com

