# SYSMAX CORP. www.nitecore.com

**SYSMAX Innovations Co., Ltd.** 

24/F,TCL Plaza, No. 18 Haizhou Road, Haizhu District, Guangzhou,
510335, Guangdong, China
Tel: +86 20 83862000 Fax: +86 20 83882723
E-mail: info@nitecore.com



### NITECORE®



- 4 Awards
- 6 Brand Image
- 8 Global Users
- 10 Knowledge
- 13 Patents
- 14 Quality Assurance
- 16 Scenarios



CONTENTS

- 20 NU Series
- 29 UT Series
- 32 Headlamp Series



- 38 EDC Series
- 42 Tiny Monster Series
- 44 Precise Series
- 48 Multitask Hybrid Series
- 51 Smart Ring Tactical Series
- 51 Chameleon Series
- 52 Multi-Task Series
- 55 NPL Series
- 56 T Series



Outdoor Electronics

- 76 Portable Power
- 80 Outdoor Gear
- 90 Chargers

rn Series

# 64 Other Lighting

- 64 NWL Series
- 65 GEM Series
- 65 DL Series

66 Accessories



- 98 Cleaning Solutions
- 103 Camera Batteries and Chargers

106 Other Accessories

# 108 Carry Gear

114 Specifications



**Photography** 

Accessories



www.nitecore.com

1223APCT24EN

# NITECORE®



2020 i4000R **NB10000** 

2021

**NPS600** 

2025 **Discover the Next Chapter** 

2023

NiteLab® **UHI LED** 

# **ABOUT NITECORE**

Inspired by the notion to "Keep Innovating" with the industry-leading innovative power for 18 years, NITECORE is the first brand to achieve a grand slam milestone in the industries of professional lighting and chargers to receive the German iF Design Award, Red Dot Design Award, the Japanese G-Mark (Good Design) and the American IDEA, as well as Gold Winners of the ISPO Award and Outstanding Outdoor globally recognized in the outdoor industry. We specialize in product lines varying from professional lighting to outdoor electronics, camera cleaning solutions, and carry gear specially designed for law enforcement and military departments, industrial corporations and outdoor enthusiasts worldwide.

BlowerBaby™





**UT27** 

**Establishment** 

2007 130° 5000°

# **PRODUCT AWARDS**

Established in 2007, NITECORE has long been at the forefront of technological advancement in portable illumination. Through its tremendous research and development capacity, NITECORE has become the first brand in the professional lighting and illumination industry to receive all four grand international design prizes including the American IDEA, the German iF Design Award, Red Dot Design Award and the Japanese G-Mark (Good Design), in addition to the worldly famous ISPO Award in the outdoor industry. NITECORE products are internationally recognized in over 130 countries.



### CineWind™ CW20

Multipurpose Pocket GOOD DESIGN AWARD 2024 Photography Fan



# CineWind™ CW30

Portable Cord-Free Photography Fan





**EMR10** 

Portable Electronic Multipurpose Repeller
























### TINI2 **Dual-Core Intelligent** Keychain Light















Portable Outdoor Power Station





































**REPO** 








# **MEDIA RECOGNITION**













































# **GLOBAL PRESENCE**

NITECORE has played an essential role in various organizations around the globe and has made great contributions to the outdoor, tactical and photography industry. By now we are the active members of the following organizations



The Portable Lights American Trade Organization (PLATO)



National Shooting Sports Foundation (NSSF)



High and New Technology Enterprise (HNTE)



China Sporting Goods Federation (CSGF)

# **AMBASSADORS**







































@ 测评界的野路子



@Live and Give 4X4



@NickShabazz



@ 萤火部落



@Mirco Tere & Bella



@Frugal Outdoors & Camping



@Daniel Kordan





@ 九千说刀



@MILIholicy

# \*\*\*\* **GLOBAL USERS**

NITECORE has gained global popularity and is beloved by users around the world. Our products are regularly featured on major social media platforms and highly recommended by users from various regions.



@Charles BridgTec



@LumenLaboratory



@Nakashi Army







@Canadian Prepper



@Run4Adventure



@ 支骏



@survivalland



@Andrea Carretta



@Jon Gadget



@Outer Limitless



@Jiggie Alejandrino



@Josh Fenn



@Chrispy Things [EDC]



### **Industry's First Professional Portable Lighting LED Brand**

Both NiteLab and NITECORE belong to SYSMAX which is dedicated to exploring LED technology to reinvent the portable lighting LED solutions.



# **LED New Benchmark**

NiteLab cooperated with an industrial partner to jointly develop the UHi LED Series, specially designed for portable lighting. Featuring high light density and ultra high beam intensity, the UHi LED utilizes the round light emitting surface (LES) to achieve an optimal lighting effect and beam distance, which challenges the impossible and begins a new era.

UHi 20/MAX **UHi 25** UHi 40/MAX **UHi 50 UHi 100** 

# From Square to Round





# **Ultra Mini Design Ultra High Light Density**

**Light Density Comparison** 

(Max brightness per square millimeter of the light emitting surface)

**UHi 20** 876 Lumens/mm<sup>2</sup>





Same Power LED 611 Lumens/mm<sup>2</sup>

# State-of-the-art **Long Range Performance**

Max Beam Distance Comparison

**Max Beam Intensity Comparison** 

21.5% 1 Improvement

42% ↑ Improvement

**UHi 40 LED** 

705 Meters

UHi 40 LED 124,307cd

Conventional LED

580 Meters

Conventional LED

87,500cd



UHE, short for Ultra High Efficiency, represents NiteLab's pioneering development in LEDs and is specifically designed for high performance gear such as headlamps. It delivers enhanced efficiency per watt, offering a brighter, more energy-efficient, and long-lasting lighting experience.

### **Max Luminous Efficiency Comparison**

**UHE LED** 

21% 1 **UHE LED** 190 lm/W

SST 40 LED

157 lm/W

# MCT UHE LEDS



MCT stands for Multiple Color Temperatures. The MCT LEDs, developed by NiteLab based on UHE LEDs, offer both multiple color temperatures and high luminous efficiency.





6500K Cool White Light

NITECORE Models: NU27, HA23 UHE

# **LUMIN SHIELD™**



LUMIN SHIELD™, specially designed by NITECORE, enables an instant defense with a blazing output thanks to a multicore UHi MAX LED. This technology is engineered to provide an unprecedented wide-area protective coverage, resembling a shield.

NITECORE Models: EDC31, EDC33, EDC35, EDC29

# Rapid Lock™ **Lockout Switch**

Rapid Lock™

Full Lock / Half Lock / Unlock With One Slide

NITECORE Models: EDC23, EDC29, EDC31, EDC33, EDC35



11

# **Ultraviolet**

The UV light has shorter wavelengths than visible light, and is also known as black light. Ultraviolet LED flashlights are useful in many applications, including identifying forged documents, tracing marked bills, leakage/grease inspection, sanitary check, hunting scorpions etc.

NITECORE Models: TIKI, TIKI UV, THUMB LEO

### Infrared

The IR light is with wavelengths longer than those of visible light. Extensive uses for military and civilian applications include target acquisition, surveillance, night vision, homing, and tracking.

NITECORE Models: CI7, NU06 MI





# STROBE READY™

In law enforcement, the strobe flashlight for self-defense is used on potential suspects who may present a danger but are not lethally armed. The strobe light is disorienting to the person it is aimed at which makes it difficult for them to concentrate. Also, they avert their eyes away from the strobing effect. This means it is easier for the police to subdue successfully and control the suspect.



2<sup>nd</sup> Generation STROBE READY™ Technology

- Specially designed for tactical applications to enable a quick access to STROBE Mode (Patent No. ZL201320545349.4)
- 2 Inset pedal design to avoid accidental activation (US Patent No. 15/846299 US10237955B1)

The 2<sup>nd</sup> Generation STROBE READY™ Technology is specially designed by NITECORE for tactical applications to enable a quick access to STROBE Mode with the dual tail switches and the inset pedal design to avoid accidental activation.

NITECORE Models: P10i, P20i UV, P10iX, P20iX, P20UV V2, CI7



# **Advanced Randomly Changing STROBE Mode**

The randomly changing frequencies available in the STROBE Mode of the latest NITECORE models can cause stronger dizzying effects due to the inadaptability of the naked eyes.

NITECORE Models: P10i, P20i UV, P10iX, P20iX, CI7



# TurboReady™

NITECORE aims to lead a trend of new tactics with the TurboReady<sup>TM</sup> technology to enable an instant dazzle strike with a blazing tactical output, in order to produce an abrupt disturbance to your adversary during the day or at night.

NITECORE Models: TM20K, TM12K



# **PATENTS**

With advanced technologies and technical personnel, NITECORE has been keeping innovating over the years and has harvested over one hundred invention patents and utility model patents.






























**Luminous Flux Testing** 

NITECORE uses integrating spheres to accurately evaluate data such as luminous flux and color temperature.



**Button Life Testing** 

NITECORE uses a button life testing machine to determine the buttons' durability and the compressive strength of the internal structure.



High and Low Temperature Testing

NITECORE uses a constant temperature and humidity test chamber to test the product performance in extreme temperature and humidity.



**Aging Testing** 

NITECORE adjusts the product to its highest output and test its reliability by simulating long-term use conditions to ensure quality before shipment.



**Battery Safety Testing** 

Rigorous tests are carried out on the battery, as well as to check the performance and lifespan of the battery in extreme environments

# WHEN THERE IS DARKNESS THERE IS A NITECORE LIGHT

NITECORE LED lights are standard equipment for military and law enforcement in various countries, as well as professional gear favored by outdoor enthusiasts around the world. This proves NITECORE to be the ideal choice for outdoor adventures, law enforcement, trail running, industrial lighting and many other fields.



# Hiking/Trekking

Generally, lights for hiking not only require high output but also light weight, long duration and reliability. For team leaders, high output and farreaching spotlights help them to see the path ahead, and a red caution light makes it easier for their team members to find and follow them.

Recommended Models: NU27, NU25, NU33, NU40, NU43, NU50, HA13



# Running

For long distance running, runners may prefer a lightweight headlamp with flood light and long runtime. High output and red caution light are required when necessary. For those who enjoy leisurely urban night running, a high performance headlamp ensures their safety in running.

Recommended Models: NU27, UT27, NU25, HA11, NU31, NU25 UL, HA13



# Caving

Due to the dangerous and low-light environment in caves, high output lights are required for caving. Since there is water in caves and the temperature is low, low temperature resistance and waterproofness are necessary. Ruggedness are also paramount.

Recommended Models: HC60 UHE, HC65 UHE, NU33, NU40, NU43



# Climbing

Considering the harsh environment at high altitude, a headlamp with high intensity, long runtime and grand throw is essential. For freezing environments, low temperature resistance is required to maintain stable performance of lights. Hands-free and lightweight products are more popular.

Recommended Models: HC60 UHE, HC65 UHE, NU43, NU50, HA13



# **Camping**

For camping, a lightweight and portable lantern with a loop or magnetic base may be the most convenient to set hands free. Besides high output, it also requires soft beam with high colour rendering index, long duration and more.

Recommended Models: NU27, NU25, LR40, LR70, Bubble, NU33, NU31, NU40, NU43



# **Search & Rescue**

For search and rescue, a lighting tool should preferably have blinding lumens, superb beam distance as well as long runtime. Qualities like portability, ruggedness and light weight are also a plus.

Recommended Models: TM20K, P30i, NU43, NU50, MH12 Pro, P35i, MH25 Pro, MH40 Pro



# Military & **Law Enforcement**

For military and law enforcement applications, a simple and intuitive UI is crucial, and STROBE READY™ perfectly meets this need. Besides, it requires high output and tactical defense function. Using with bezel, tactical ring, gun mount and remote switch to enhance the tactical function overall.

Recommended Models: P20iX, P20UV V2, CI7, P23i, NPL25, SRT7i



# Security

The lighting tools for security should have high output, long runtime and direct access to strobe. This kind of lighting tool should be highly reliable in resisting dust, water and shocks, and should be tough enough to confront contingencies.

Recommended Models: P23i, P20iX, P20UV V2, NU06 LE, NU07 LE, SRT7i



### **Hunting**

A hunting light should have high output with optimal beam distance to ensure long range visibility. Light weight, compatibility with shotguns, ability to absorb recoil are also required. Colored outputs are preferred to preserve users' night adapted vision, or to not startle the preys.

Recommended Models: P30i, NEW P30, MH25 Pro, MH40 Pro, P35i



### **EDC**

EDC (Everyday Carry) is designed to be carried with you everyday, thus it must be ultra-compact, lightweight, and always works when you need it. It does not require multiple choices of brightness levels, whilst sufficient runtime and easy operation are necessary.

Recommended Models: EDC29, EDC27, EDC25, EDC23, EDC31, EDC33, EDC35, T4K, TIP2, TIKI



# **Industrial Workplace**

Rechargeable lights are usually welcomed by industrial workers due to better cost performance. Handsfree capability, portability, an intuitive user interface are required to ensure convenience. For hazardous industries like mining or oil extraction, explosionproof lights are mandatory.

Recommended Models: UT27, NU35, NU50, HC60 UHE, HC65 UHE, NWL20, HC70 UHE



# Cycling

Lighting with capability to illuminate blind spot ahead or under foot is essential to ensure safety in cycling. Features like multiple modes for different riding conditions, easy to operate, install or remove, flexible charging options, and compatibility with handlebars of various sizes also add up to a great bike light. A rear caution light is also necessary for maximum attention and safety.

Recommended Models: BM06 + HC60 UHE/HC65 UHE



# Fishina

Hands-free capability is paramount. Colored outputs are inconspicuous, especially blue light. Blue light will not alarm underwater wildlife, and is able to attract some fishes, and activate fluorescence of the float, which is why it is well received by fishermen or fishing

Recommended Models: HA11, NU25, NU11



# Diving

A flashlight for diving needs to be totally waterproof and reliable, with high output, sufficient duration and flexibility. It is better to have a lanvard in case of loss. Red output is a plus for it serves as a supplementary lighting underwater. Recommended Model: DL30

# **HEADLAMPS**





# NITECORE HEADLAMP GUIDE

# **Entry Level**

# **Premium**

# **Superior**



**NU25** 

Dual Beam USB-C Rechargeable Headlamp



**UT27** 

Dual Beam Lightweight Trail Running Headlamp



### HC60 UHE

High Performance Rechargeable Outdoor Headlamp





NU25 UL

Ultra Lightweight Dual Beam USB-C Rechargeable Headlamp



Triple Output Lightweight Outdoor Headlamp



HC65 UHE

Ultra High Triple Output Metal Headlamp







**NU27** 

### **NU43**

High Output Lightweight 18650 Rechargeable Headlamp



# HC65 UHE

Ultra High Triple Output Metal Headlamp



HC60 UHE

Camping



Hiking

### **NU30**

Triple Output Lightweight Outdoor



**NU53** 

### **NU33**

Triple Output USB-C Rechargeable





### High Performance Rechargeable Outdoor Headlamp



Industrial Maintenance

High Output Lightweight Industrial



# **HU2000**

High Output Split-Type Work



# HC65 UHE

Ultra High Triple Output Metal



# **Fishing**

Caving

**NU11** 

Intelligent IR Sensor Clip-on Cap Light



HU2000

High Output Split-Type Work

# **NU21**

Ultra Lightweight Dual Beam Outdoor Headlamp



# Triple Output Lightweight Outdoor Headlamp

**NU30** 



# **HC60 UHE**

High Performance Rechargeable



High Performance 21700 Rechargeable Work Headlamp



Please note that this guide is for reference only. Base your final decision on your personal needs and preferences. Please refer to the actual product details to ensure it meets your specific requirements.



NITECORE NU series are lightweight, lithium-powered illumination

tools featuring uniform wide beams, high output main LEDs, lower

output secondary colored LEDs and bodies crafted from durable PC materials. Purpose-designed for hiking, climbing, camping

and general outdoor recreation, NITECORE headlamps set new

standards in output, functionality, comfort and runtime.



# **Ultra Lightweight Multiple Color** Temperatures Outdoor Headlamp



123 Meters و 600 Lumens

\_\_\_\_ 56g (1.98 oz) ( 57 Hours

Built-in 850mAh Li-ion Battery

USB-C Rechargeable



2 Colors Available





### Features











# **Dual Beam USB-C Rechargeable Headlamp**

400 Lumens

64 Meters

(1) 45 Hours

<u>○</u> 56g (1.98 oz)

Built-in 650mAh Li-ion Battery

USB-C Rechargeable









Dual-purpose Sports Headband

Keep the sweat off

Reflective

Glow-in-the-dark

Lightweight

### Features

### **3 Light Sources**



Spotlight For road observing and signage searching



Over 100° wide range Ideal for short-range illumination



**Red Light** Ideal for map viewing, emergency response, and more







NU25 UL

**NU21** 

**NU20 Classic** 

	Ultra Lightweight Dual Beam USB-C Rechargeable Headlamp	Ultra Lightweight Dual Beam Outdoor Headlamp	Ultra Lightweight Outdoor Headlamp
3115	400 Lumens	360 Lumens	360 Lumens
	64 Meters	58 Meters	109 Meters
	Built-in 650mAh Li-ion Battery	Built-in 500mAh Li-ion Battery	Built-in 500mAh Li-ion Battery
	USB-C Rechargeable	USB-C Rechargeable	USB-C Rechargeable
Ô	45g (1.59 oz)	44g (1.55 oz)	38g (1.34 oz)

# **NU33**

### Triple Output USB-C Rechargeable Headlamp

31/2 700 Lumens

135 Meters


(L) 147 Hours

95.5g (3.37 oz)

Built-in 2,000mAh Li-ion Battery

■ USB-C Rechargeable

### Features

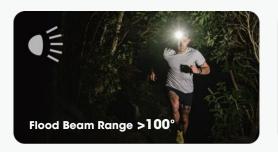













**NU35** 

**NU30** 

3 Colors Available

**NU31** 

	Triple Output Lightweight Outdoor Headlamp	Triple Output Lightweight USB-C Rechargeable Headlamp	Dual Power Hybrid Working Headlamp
3115	500 Lumens	550 Lumens	460 Lumens
	130 Meters	145 Meters	48 Meters
	Built-in 1,500mAh Li-ion Battery	Built-in 1,800mAh Li-ion Battery	Built-in 590mAh Li-ion Battery + 3 × AAA Batteries
	USB-C Rechargeable	USB-C Rechargeable	USB-C Rechargeable
	90g (3.17 oz)	95.5g (3.37 oz)	79.5g (2.80 oz)

# **NU43**

High Output Lightweight 18650 Rechargeable Headlamp

1,400 Lumens 130 Meters

<u>0</u> 116g (4.09 oz)

3,400mAh (Built-in 18650 Li-ion Battery)

USB-C Rechargeable

# Features

HIGH (600 Lumens) 10 Hours

MID (300 Lumens) 15 Hours

LOW (100 Lumens) 29 Hours




















# **NU40**

**NU45** 

	High Performance Lightweight USB-C Rechargeable Headlamp	High Output Lightweight 18650 Rechargeable Headlamp
311/2	1,000 Lumens	1,700 Lumens
	100 Meters	172 Meters
	2,600mAh (Built-in 18650 Li-ion Battery)	4,000mAh (Built-in 18650 Li-ion Battery)
	USB-C Rechargeable	USB-C Rechargeable
Ĉ	116g (4.09 oz)	126g (4.44 oz)
	IP68	IP68







**NU50** 

**NU53** High Output Lightwoight Industrial

	Superior Performance 21700 USB-C Rechargeable Headlamp	High Output Lightweight Industrial Headlamp
311/2	1,400 Lumens	1,800 Lumens
	130 Meters	175 Meters
	5,000mAh (Built-in 21700 Li-ion Battery)	6,000mAh (Built-in 21700 Li-ion Battery)
	USB-C Rechargeable	USB-C Rechargeable
Ĉ	146g (5.15 oz)	151g (5.33 oz)
	IP68	IP68

# **NU11**

### **Intelligent IR Sensor Clip-on Cap Light**

≥150 Lumens

50 Meters

6 Hours

41g (1.45 oz)

Built-in 600mAh Li-ion Battery

USB-C Rechargeable



# **Helmet Accessories**

Specially designed for attaching NU Series headlamps to the helmets

# **Helmet Mount Base**



**HMB1**Universal Helmet Mount Base



**HMB1S**Sport Helmet Mount Base



HMB1 TAC
Tactical Helmet Mount Base

# **Headlamp Bracket**



HLB20 Compatible with NITECORE NU21, NU25, NU25 UL and more



**HLB30**Compatible with NITECORE NU31, NU33 and more



HLB40 Compatible with NITECORE NU40, NU43 and more



HLB50 Compatible with NITECORE NU50 and more



# **Ideal Choices for Longer Headlamp Runtime**

# Carbon Battery™ 6K Extended Headlamp Runtime Kit

# **Double Up on Runtime**

6,000mAh 3.6V (21.6Wh)

134g (4.73 oz) Total Weight


(C) IP68

### Features



Well-balanced Design





Quick Release Construction
For easy battery replacement



Red Safety Rear Light

# 18650 Extension Battery Case

**Always Ready to Use** 

# **Battery Option:**

18650 Li-ion battery (Flat Top Battery Excluded)



Both of them are compatible with the HC65 UHE, HC60 UHE, HC75 UHE, HC70 UHE, NU53, NU50, NU43, NU40, and more.







# NU05 V2

# NU06 LE

	Ultra Lightweight USB-C Rechargeable Headlamp Mate	Mini Signal Light Law Enforcement Version
	4 x High Performance LEDs	4 × High Performance LEDs
3,1,5	40 Lumens	15 Lumens
	47 Hours	75 Hours
	USB-C Rechargeable	USB-C Rechargeable
Ĉ	11.1g (0.39 oz)	15.8g (0.56 oz)
Light Sources		
Modes	5 Modes (Red Indicator Slow Flashing + 2 Colors Slow Flashing + Red Light Quick Flashing + White Light Constant-on)	9 Modes (4 Colors Constant-On + 4 Colors Flashing + Red/Blue Police Warning Flashing)





# NU06 MI

NU07LE

	IR Mini Signal Light Military Version	Rechargeable Signal Light Law Enforcement Version
	4 x High Performance LEDs	5 x High Performance LEDs
311/2	8Lumens	15 Lumens
<u>(</u> )	75 Hours	50 Hours
	USB-C Rechargeable	USB-C Rechargeable
Ĉ	16.7g (0.59 oz)	24.5g (0.86 oz)
Light Sources	ir.	
Modes	9 Modes (3 Colors Constant-On/Flashing + Red/Blue Police Warning Flashing + IR Constant-On/Flashing)	11 Modes (5 Colors Constant-On + 5 Colors Flashing + Red/Blue Police Warning Flashing)



Dual Beam Lightweight Trail Running Headlamp

NiteLab UHE LED

31/2 800 Lumens

168 Meters

(L) 14 Hours 30 Minutes (2.61 oz)

HLB1500 Li-ion Battery Pack / 3 x AAA


2 Colors Available



Features






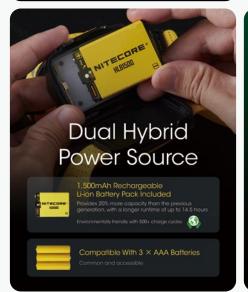







NITECORE Headlamp Series offers high performance and ultra lightweight headlamps, featuring a replaceable battery and powerful output. These headlamps enable users to tackle various challenges quickly and efficiently, ideal for military applications, search and rescue, industrial safety, outdoor sports, and more.



# **HA23 UHE**



### **Multiple Color Temperatures** Lightweight AAA Headlamp



NiteLab MCT UHE LEDs





















HLB1500 Li-ion Battery Pack



3 × AAA Batteries







		ы.	
٦,	AΙ	ш	

**HA13** 

**HA15 UHE** 

	Multipurpose Ultra Lightweight AA Headlamp	Multipurpose Dual Beam AAA Headlamp	Multipurpose Ultra Lightweight AA Headlamp
311/2	240 Lumens	350 Lumens	400 Lumens
	90 Meters	120 Meters	80 Meters
	1×AA / 1×14500	3 x AAA / 1 x HLB1300	1 x AA / 1 x 14500
(Battery Not Included)	38g (1.34 oz)	67g (2.36 oz)	43g (1.52 oz)

# **HU2000**

### High Output Split-Type Work Headlamp



NiteLab UHE LED

■ USB-C Powered







With the NB10000:



With the Carbon Battery™ 6K **Extended Headlamp Runtime Kit:** 10h Runtime





**USB-C Extension Cable** Compatible with most power banks

**Split-Type Design** 



Photography

# HC65 UHE

# **Ultra High Triple Output Metal Headlamp**



2,000 Lumens

222 Meters

82 Hours

152g (5.36 oz)

IP68 (Internal Waterproofing) 2m Impact Resistant

4,000mAh 18650 Li-ion Battery USB-C Rechargeable





2 Colors Available





### Features







### **Wide Compatibility**



18650 Extension Battery Case



Carbon Battery™ 6K Extended Headlamp Runtime Kit



HLB40 Headlamp Bracket + HMB1/HMB1S/HMB1 TAC Helmet Mount Bases



BM06 Headlamp Bike Mount

### **Various Activities**













Emergency

# **HC65M UHE**

**Ultra High Triple Output Metal Tactical Headlamp** 



# **HC60 UHE**

### **High Performance Rechargeable Outdoor Headlamp**



157 Meters 31/2 1,600 Lumens

140g (4.94 oz) 200 Hours

4,000mAh 18650 Li-ion Battery

USB-C Rechargeable

NEW









# HC70 UHE

HC75 UHE

	High Performance 21700 Rechargeable Work Headlamp	High Performance 21700 Rechargeable Work Headlamp
	NiteLab UHE LED	NiteLab UHE LED
311/2	1,600 Lumens	3,000 Lumens
	156 Meters	195 Meters
	6,000mAh 21700 Li-ion Battery	6,000mAh 21700 Li-ion Battery
	USB-C Rechargeable	USB-C Rechargeable
Å	172g (6.07 oz)	209g (7.37 oz)
3	IP68	IP68










**HC33** 

**HC35** 

	High Performance L-shaped Headlamp	Next Generation 21700 L-shaped Headlamp
	CREE XHP35 HD LED	4 × CREE XP-G3 S3 LEDs
314	1,800 Lumens	2,700 Lumens
	187 Meters	134 Meters
	1 × 18650, 2 × CR123/RCR123	1 × 21700, 1 × 18650, 2 × CR123/RCR123
	330 Hours	1,200 Hours
	51.2g (1.80 oz)	138.5g (4.88 oz)



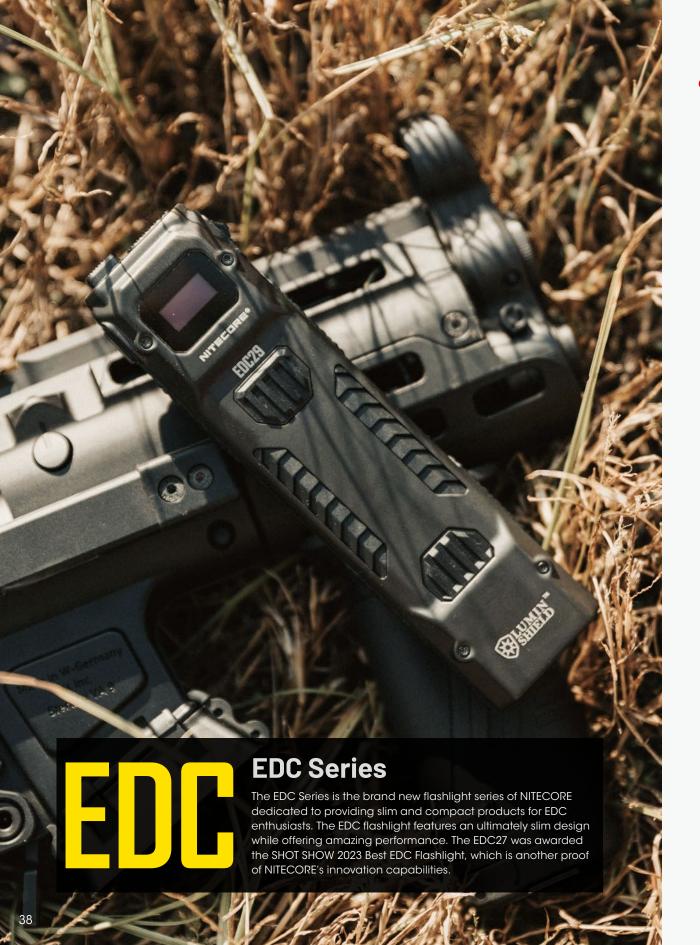



2 x NiteLab UHi 20 MAX LEDs

<u>0</u> 160g (5.64 oz) (L) 61 Hours

Built-in 2,500mAh Li-ion Battery

■ USB-C Rechargeable

Features

**Extensive** 

Armor-Style Anti-Slip Texture













# **Ultra Slim Pocket Tactical EDC Flashlight**

2 x NiteLab UHi 25 LEDs

2,500 Lumens 280 Meters

(L) 39 Hours (2.56 oz)

Built-in 1,500mAh Li-ion Battery

USB-C Rechargeable



### Features

# **Advanced Sandwich Construction**









Mode

Remaining



# EDC25

Voltage

# Ultra Slim Tactical EDC Flashlight

Remaining

2 × NiteLab UHi 20 LEDs

3,000 Lumens 300 Meters

Built-in 1,700mAh Li-ion Battery

USB-C Rechargeable





### **Ultra Slim Tactical EDC Flashlight**

2 × NiteLab UHi 20 LEDs

→ 3,100 Lumens 305 Meters

Built-in 1,700mAh Li-ion Battery

USB-C Rechargeable













EDC31

EDC33

EDC35

	Compact Tactical EDC Flashlight	Tactical EDC Flashlight	Tactical EDC Flashlight
	NiteLab UHi 20 MAX LED	NiteLab UHi 20 MAX LED	NiteLab UHi 40 MAX LED
311/2	3,500 Lumens	4,000 Lumens	5,000 Lumens
	380 Meters	450 Meters	550 Meters
	Built-in 3,800mAh Li-ion Battery	Built-in 4,000mAh 18650 Li-ion Battery	Built-in 6,000mAh 21700 Li-ion Battery
	USB-C Rechargeable	USB-C Rechargeable	USB-C Rechargeable









Instant Defense

High Capacity

# TM9K Pro

# High Output Self-Defense Tactical Flashlight



3 × NiteLab UHi 40 MAX LEDs







USB-C Rechargeable





# **TM12K**

# TURBO READY™

### High output Self-Defense Tactical Flashlight



6 × CREE XHP50 LEDs



200 Hours

233g / 8.22 oz

Built-in 4,800mAh 21700 rechargeable Li-ion battery

USB-C Rechargeable



# **TM20K**

# TURBO READY™

# TurboReady™ Ultra High Performance Searchlight



20,000 Lumens 290 Meters

Built-in Li-ion Battery

USB-C Rechargeable





Rescue

Defense


# reddot winner 2022





All of our groundbreaking Tiny Monster models have thoroughly changed the way people think about portable lights, and more importantly, what they actually carry and use. Created for search and rescue as well as outdoor adventures, our Tiny Monster series is now employed in countless professional applications where bright lighting is needed.

Search &

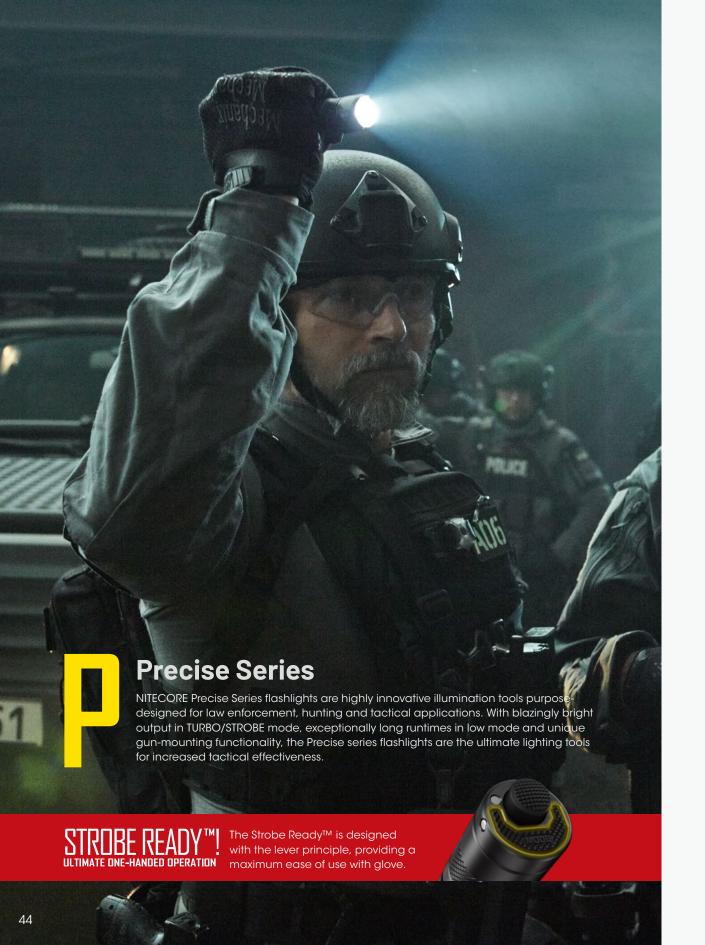



# **Xtreme Performance i-Generation 21700 Tactical Flashlight**







USB-C Rechargeable

+ STROBE Mode uses randomly

+ The power indicator indicates

the remaining battery power

changing frequencies for

stronger dizzying effects + Tactical Mode and Daily Mode

### Features



available

2<sup>nd</sup> Generation Inset Pedal Design with dual tail switches

> Strike bezel uses high strength silicon nitride ceramics

> > Anti-impact reverse polarity protection mechanism for shooting sports

NTR10 Tactical Ring

Pro compatible

### Compatible with various i Series modular extensions



USB-C Remote Switch





**P20i UV** 



# i-Generation 21700 White + UV Dual Output Flashlight



୬ 1.800 Lumens

≥"≈ 320mW 365nm

337 Meters USB-C Rechargeable

1 × 21700 i Series Battery, 2 × CR123/RCR123



# **P20UV V2**



### STROBE READY™ White + UV Dual Output Tactical Flashlight



≥4 1,000 Lumens

164 Meters

≥<sup>1</sup>/<sub>2</sub> 320mW 365nm

■ USB-C Rechargeable

1 x 18650, 2 x CR123/RCR123



Remote Switch

# P10iX STROBE READY IN LITIMATE ONE-HANDED OPERATION

### **Xtreme Performance i-Generation 21700 Ultra Compact Flashlight**



4,000 Lumens 158 Meters

1 × 21700 i Series Battery, 2 × CR123/RCR123

USB-C Rechargeable



# **P10i**



### i-Generation 21700 Ultra Compact Tactical Flashlight

Luminus SST-40-W LED

1,800 Lumens 290 Meters

1 × 21700 i Series Battery, 2 × CR123/RCR123

USB-C Rechargeable



# P10 V2



### STROBE READY™ Ultra Compact Tactical Flashlight

CREE XP-L2 V6 LED

1,100 Lumens 201 Meters

1 x 18650, 2 x CR123/RCR123



# **P23i**



Silicon Nitride Ceramics

# Luminus SFT-70 LED

3.000 Lumens 470 Meters

1 × 21700 i Series Battery

■ USB-C Rechargeable

Features



Protection Mechanism

# **P35i**



# **Ultra Long Distance Dual Beam LEP Flashlight**

6 x CREE XP-G3 LEDs, 1 x Class 1 LEP Light

≥ 3.000 Lumens 1.650 Meters

1 × 21700 i Series Battery, 2 × CR123/RCR123

■ USB-C Rechargeable

### Features



Multifunctional OLED Display







# **P30i**

# i-Generation 21700 High Output Searchlight

CREE XHP35 HI LED

2,000 Lumens 1,000 Meters

1 × 21700 i Series Battery 2 × CR123/RCR123

USB-C Rechargeable



**P30i KIT** 

# **NEW P30**

### **Next Generation 21700 Searchlight**

CREE XP-L HI V3 LED

1,000 Lumens 618 Meters

1 × 21700 / 1 × 18650 2 × CR123/RCR123





**NEW P30 KIT** 



NiteLab UHi 40 LED USB-C Rechargeable

3,300 Lumens

505 Meters

1 × 21700


# Features

### **Intuitive Indicators**



Power Indicators

# **User-Friendly Operation**









MH12 Pro KIT

# MH10 V2

### Next Generation 21700 Dual Fuel EDC Flashlight

© CREE XP-L2 V6 LED © USB-C Rechargeable

1,200 Lumens 202 Meters

1 × 21700, 1 × 18650, 2 × CR123/RCR123

# **MH11**

### **USB-C Rechargeable Ultra Compact Flashlight**

© CREE XP-L2 V6 LED © USB-C Rechargeable

۱,000 Lumens

190 Meters

1 × 18650, 2 × CR123/RCR123





# Multitask Hybrid Series NITECORE Multitask Hybrid (MH) dual-fuel rechargeable

NITECORE Multitask Hybrid (MH) dual-fuel rechargeable flashlights are a line of highly versatile and practical illumination tools designed for a multitude of users and applications. Featuring a high-precision long-range reflector, well-spaced brightness settings plus STROBE and SOS modes, the MH series is the ultimate lighting tools for hunting, trekking, camping, law enforcement, search and rescue.

# MH40 Pro

### **Ultra Bright Long Range Hunting Flashlight**





3,500 Lumens

NITECORE NBP100R Li-ion Battery Pack,

 $2 \times 21700$ 

### Features



2.4G Wireless Control

### **Multiple Tactical Accessories Included:**



Hook-and-Loop

Fastener





Picatinny Rail Mounts Hook-and-Loop (Optional) Straps



NBP100R Li-ion Battery Pack Included (10,000mAh)

MH40 Pro KIT

# MH25 Pro

# Ultra Long Range USB-C Rechargeable Flashlight



NiteLab UHi 40 LED



705 Meters



USB-C Rechargeable



MH25 Pro KIT



# **MH15**

### 2-in-1 High Performance Compact Flashlight



Luminus SST40 LED

■ USB-C Rechargeable

2,000 Lumens

250 Meters

Built-in 5,000mAh Li-ion Battery

### Features

- + 5000mAh Power Supply
- + QC18W Input & Output



# **Smart Ring Tactical Series**

NITECORE SRT Series features 4th generation SSR (Smart Selector Ring) technology, offering variable brightness adjustment and unprecedented ease of use. The SSR interface allows users to select modes and brightness levels by simply rotating a smooth magnetic ring. This industry leading design is both user-friendly and extremely durable, making it ideal for law enforcement and tactical applications.



# SRT7i

### Superior Performance SmartRing Tactical Flashlight



Luminus SFT-70 LED

■ USB-C Rechargeable

3,000 Lumens

**580 Meters** 

1 x 21700 i Series Battery, 2 x CR123/RCR123









innovative offering from NITECORE. Featuring the white output and another choice of Red, Green, Blue, Ultraviolet or Infrared, Chameleon flashlights offer incredible versatility for a wide range of applications. The latest model has an easy and unique switching mechanism combined with our patented STROBE READY™ Technology.





### **Dual Output Tactical IR Flashlight**



2,500 Lumens 279 Meters

୬½ 7,000mW 940nm

1 x 18650, 2 x CR123/RCR123

3 output levels

MID

HIGH 1,000mW 3,000mW 7,000mW

Easy dual beam switching mechanism between IR and white beams



# **MT1A Pro**

### High Output Compact Rechargeable AA Flashlight



800 Lumens 250 Meters

1 × NITECORE NL1411R (1,100mAh) 14500 Li-ion Battery,  $1 \times AA$ 





### High Performance Rechargeable AA Flashlight

NiteLab UHi 20 LED

1,000 Lumens 255 Meters

1 × NITECORE NL1416R (1,600mAh) 14100 Li-ion Battery,  $2 \times AA$ 



# MT1C Pro

# **High Output Compact Tactical Flashlight**

NiteLab UHi 20 LED

1,000 Lumens 360 Meters

1 × NITECORE NL1816R (1,600mAh) 18350 Li-ion Battery, 1 x CR123/RCR123









# MT2C Pro

# **High Output Compact Tactical Flashlight**

NiteLab UHi 20 LED

1,800 Lumens **5**20 Meters

1 × NITECORE NL1836R (3,600mAh) 18650 Li-ion Battery, 2 x CR123/RCR123









# Multifunctional 90° Adjustable Flashlight

CREE XP-L HD V6 LED

→ 1,000 Lumens 184 Meters


1 x 18650, 2 x CR123/RCR123







90° adjustable head Single side switch Industrial Workplace EDC EDC

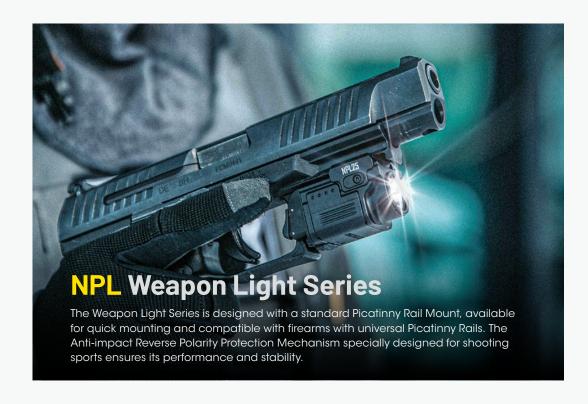



### **Green Laser Compact Tactical Light**

NiteLab UHi 25 LED

216 Meters 900 Lumens

\* 520nm Green Laser

500mAh Li-ion Battery

### Features





# NPL25

### **Compact Tactical Light**

NiteLab UHi 20 LED

255 Meters 900 Lumens عاد

500mAh Li-ion Battery



Outdoor Electronics





# TINI3

# ole Color Temperatures I

# Multiple Color Temperatures Intelligent Keychain Light

90 Meters



NiteLab MCT UHE LEDs





USB-C Rechargeable



Dual Buttons Design

### Features

- + 2m Impact Resistant
- + 2 Lockout Modes Available
- + Advanced Power Cut-Off (APC) Technology

# **3 Colors Available**









# Multifunctional OLED Real-time Display












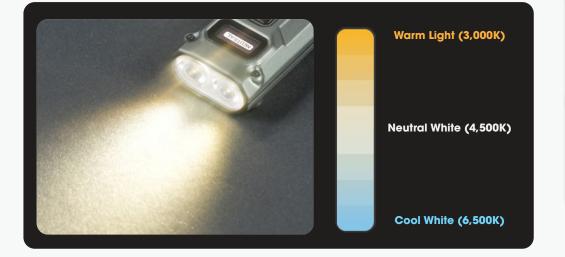



### **Dual-Core Intelligent Keychain Light**

2 × OSRAM P8 LEDs

500 Lumens

Features

Built-in Li-ion Battery



89 Meters






+ Advanced Power Cut-Off (APC) Technology

+ 2 User Modes Available

+ 2 Lockout Modes Available

**Multifunctional OLED Real-time Display** 





**Dual Emitters** 

Multiple Colors Available

**Dual Side** 

Switch Design

### **TINI2 SS Available**

(Stainless Steel Version)

# TIP2

### **Dual-Core Magnetic Keychain Light**

2 × CREE XP-G3 S3 LEDs

>1/2 720 Lumens

93 Meters

Built-in Li-ion Battery

← USB Rechargeable





# **TIP SE**

# **Dual-Core Metallic Keychain Light**

2 × OSRAM P8 LEDs

USB-C Rechargeable

ンゲェ 700 Lumens

90 Meters

Built-in Li-ion Battery



Multiple Colors . Available

# T4K

### **Quad-Core Intelligent Keychain Light**

4 × CREE XP-L2 V6 LEDs

4,000 Lumens

209 Meters

Built-in Li-ion Battery

■ USB-C Rechargeable



# The TIKI Family





Mini Futuristic











8		
31		
all		
н		
Ų		

Keychain Lights		TIKI	TIKI GITD	TIKI GITD BLUE	TIKI LE	TIKI UV
311/2	Max Output	300 Lumens			1,000mW	
<del>P</del>	Primary Emitter	OSRAM P8 LED			Luminus SST-10-UV LED	
Auxiliary		High CRI White LED Red LED		2 × High CRI White LEDs		
Ш	Emitters	UV	LED (500mW, 365	onm)	Blue LED	WHILE LEDS
	Built-in Li-ion Battery	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$
	USB-C Rechargeability	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$
- 0 -	Glow in the Dark	×			×	×

# **THUMB**

# **Portable and Tiltable Work Light**

2 x High Performance LEDs

≥ 85 Lumens

26 Meters

Built-in Li-ion Battery

◆
⇔ USB Rechargeable



# THUMB LEO

# **Portable and Tiltable Work Light**

### Law Enforcement Version

₹ 45 Lumens

24 Meters

≥" 500mW 365nm

◆ USB Rechargeable



# **TUBE V2.0**

### Tiny USB Keychain Light

୬<sup>1</sup>⁄<sub>2</sub> 55 Lumens

25 Meters

Built-in Li-ion Battery



### Multiple Colors Available

















# **LR40**

# Multifunctional USB-C Rechargeable Camping Lantern

21/2 100 Lumens (360° Omnidirectional Illumination)

USB-C Rechargeable

USB-A Output

(L) 65 Hours

Features

Built-in 4,000mAh Li-ion Battery



2 Colors Available

# **Stepless**



# **Brightness Adjustment**







# **LA10**

# LA10 CRI

### 360° Illumination Mini Camp Lantern

### **CRI Version**



Nichia 219B LED

≥<sup>1</sup>/<sub>2</sub> 135 Lumens

10 Meters 34 85 Lumens















# **LR70**

# 3-in-1 Rechargeable Lantern Flashlight



2 × Luminus SST40 LEDs + 20 × High CRI LEDs

Flashlight Mode: 3,000 Lumens Lantern Mode: 400 Lumens

10,000mAh Power Supply

USB-C Rechargeable







# **Bubble**

# All-purpose Portable Camping Lantern

الا مالا 100 Lumens



**Batteries Included** 



Available



3 Brightness Levels














# **Other Lighting**

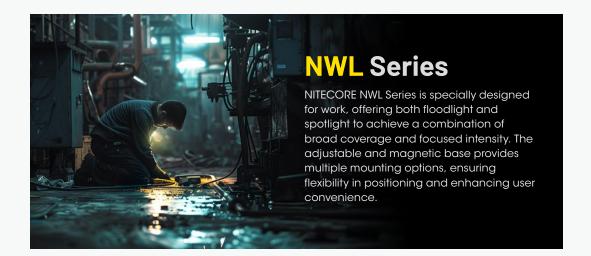

# NWL20

### Multifunctional Triple Output Work Light

Floodlight: 34 600 Lumens

43 Meters

Spotlight: 34 290 Lumens

93 Meters

Replaceable 21700 Li-ion Battery

USB-C Rechargeable

# **Multiple Mounting Options**









0° - 180° Adjustable Base

# GEM Series GEM series is professionally designed for gemstones identification, featuring high output and great penetrability. An innovative rotary switch for infinite brightness levels. Multiple light sources optional, making the series perfect for gemstones, jewelries and treasures inspection.



**GEM10 UV**Professional Gemstone Identification UV Light



≥<sup>1/2</sup> 3000mW 365nm

1 × 18650,

2 × CR123/RCR123



# **DL** Series

A flashlight for diving needs to be totally waterproof and reliable, with high output and flexibility. NITECORE DL Series is specially designed for underwater activities, offering multiple modes for underwater lighting.



### **Dive Light**

31/2 1,100 Lumens

100 Meters Submersible

273g / 9.63 oz (in Air), 126g / 4.44 oz (Underwater)

NITECORE NL2153R 21700 Li-ion Battery (5,300mAh)

### Features

### 5 Flashing Frequencies:

SOS, QUICK FLASHING, FLASHING/1s, FLASHING/2s, FLASHING/3s





# Rechargeable Li-ion Batteries



NITECORE rechargeable Liion batteries feature higher energy intensity, better power storage and longer runtime compared to other batteries, and environmental-friendly that can be recharged for over 500 times

	Model	specification	Capacity
	NL1410	14500	1000mAh
	NL166	16340	650mAh
	NL169	16340	950mAh
	NL1823	18650	2300mAh
	NL1826	18650	2600mAh
	NL1834	18650	3400mAh
	NL1836	18650	3600mAh
	NL1840	18650	4000mAh
	NL2150	21700	5000mAh
d	NL2153	21700	5300mAh
	NL2160	21700	6000mAh

Specification

# ► Micro-USB/USB-C Rechargeable Li-ion Batteries



With a built-in Micro-USB / USB-C port, it is convenient to charge the rechargeable Li-ion batteries via a USB cable.

	Model	specification	Capacity
	NL1411R	14500	1100mAh
-	NL169R	16340	950mAh
	NL1816R	18350	1600mAh
	NL1826R	18650	2600mAh
	NL1834R	18650	3400mAh
	NL1836R	18650	3600mAh
e ¯	NL2150RX	21700	5000mAh
	NL2153R	21700	5300mAh

# ► High Performance Batteries



# ► USB-C Rechargeable Li-ion AA Battery



Model	NH2400
Rated Capacity	2400mAh
Rated Energy	3600mWh
Nominal Voltage	1.5V
Input	USB-C: 5V-0.5A
Feature	USB-C Rechargeable

roj

Camera

(Hillian A)

Wireless Keyboard and



Electric Toy

NL2153HPi

NL2160HPi



Gamepad



**Power Your Devices** 



Education Equipment







# 21700 Intelligent Battery System

Ear Thermometer





ML21 Magnetic Light			
Brightness	80 Lumens		
CRI	≥ 90		
Color Temperature	4000-4500K		
Runtime	19h		
Beam Diameter	12m		
Peak Beam Intensity	9cd		



MPB21 Magnetic

Pov	ver Bank
Input	5V = 2A (MAX)
Output Voltage	4.2V±1% (Battery)
	5V±5% (USB)
Output Current	2A (MAX)
Cancin	

# ▶ 21700 i Series Battery



	Model	Specification	Capacity	Discharge Current
}	NL2150HPi	21700	5000mAh	15A
	NL2153HPi	21700	5300mAh	20A
	NL2160HPi	21700	6000mAh	20A

As a patent product developed by NITECORE, the 21700 i Series Battery is a proprietary 21700 rechargeable Li-ion battery featuring dual way output with positive and negative polarities at both ends and a high energy density.

# **▶** Gun Mounts











	GM02 Pro	GM02MH	GM03	GM04	GM06
Туре	Picatinny Rail Mount	Magnetic Mount	Generic Adjustable Mount	Generic Fixed Mount	Picatinny Rail Mount
Compatible Tube Diameter	1" (25.4mm-26.5mm)	1" (24mm-26mm)	0.3"-1.1" (8mm-28mm)	0.7"-1" (18mm-25.4mm)	25.4mm

# ► Interchangeable Tail Caps





	NTC2	NTC2i
Туре	21700 U-shaped Tailcap Switch	21700 U-shaped Tailcap Switch
Button	Power Button	Power Button + Mode Button
Compatible Model	NEW P30, and more	P10i, P30i, P10iX, P20iX, and more

#### ► Tactical Remote Switches

Noiseless pressure pad switch with professional and convenient operation, ideal for law enforcement, hunting and more scenarios.



	Compatible Models
RSW1 Pro	MH12 Pro, MH25 Pro, MH40 Pro
RSW2D	CI7
RSW2i	P10i, P30i, P10iX, P20iX, P23i, P35i
RSW3	NEW P30
RSW2i WL	P10i, P20iX, P10iX, P30i, P35i

# **RSW2i WL Wireless Remote Switch** 2.4G Wireless Control 1m (3.28ft) Max Signal Range Specially designed for wireless control of NITECORE i Series flashlights Tactical Momentary-on

# ► Tactical Holsters











	NCP40	NCP30	NTH25	NTH32
Туре	Durable Multifunction	onal Tactical Holster	Quick Draw Tactical Holster	Tactical Magnetic Holster
Compatible Model	SRT7i, MH25 Pro	P20iX, P20i UV, P20UV V2, P23i	P23i, P20iX, P20i UV, P20UV V2	P20iX



## **▶** Filters



Utilized a toughened ultra-clear glass lens with anti-reflective coating that provides impact resistance and maximum light penetrability. Flashlights equipped with the red/green/blue filters to deliver soft red/green/blue light, suitable for short range reading.

Model	<b>Compatible Size</b>	Color
NFR20 / NFG20 / NFB20	19.7mm	RGB
NFR23 / NFG23 / NFB23	22.5mm	RGB
NFR25 / NFG25 / NFB25	25.4mm	RGB
NFR26 / NFG26 / NFB26	26.8mm	RGB
NFR32	32mm	R
NFR34 / NFG34 / NFB34	34mm	RGB
NFR40 / NFG40 / NFB40	40mm	RGB
NFR50 / NFG50	50mm	RG
NFR60 / NFG60 / NFB60	60mm	RGB
NFR65 / NFG65	65mm	RG
NFR70 / NFG70	70mm	RG
NFD23	22.5mm	White
NFD25	25.4mm	White
NFD34	34mm	White
NFD40	40mm	White
NFD60	60mm	White

## ► Traffic Wands

Made from PC material that features crush, wear and high temperature resistance, traffic wand can turn flashlights into an orange traffic wand for traffic control, road guide and distress signal.


Model	Compatible Size
NTW20	19.7mm
NTW25	25.4mm
NTW26	26.8mm
NTW32	32mm
NTW34	34mm
NTW40	40mm

#### ► Titanium / Aluminum Collection







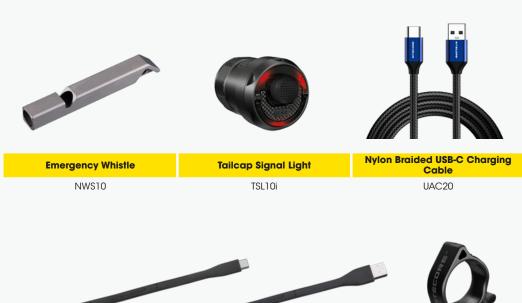





# **Portable Power**

# NB10000 Gen3

Ultra Lightweight Carbon Fiber Power Bank

#### **F**eatures

- · Carbon Fiber Sheets
- 150g (5.29 oz) Ultra Lightweight
- 10,000mAh
- · 22.5W Max Output







HOT





Your lightweight companion for trail running, trekking, camping, and more



**Corner Cushions** 

Reduce impact and wear on your gear for a comfortable run



NB10000 Gen3:

#### Carbon Fiber Composite **Anti-Torsion Structure**

Provides enhanced resistance to strength and deformation



**Dual USB-C Ports** Allow for pass-through charging



## NB10000 Gen3

## **NB10000**

	Ultra Lightweight Carbon Fiber Power Bank	Ultra Lightweight Carbon Fiber Energy Brick
Capacity	10,000mAh 3.85V (38.5Wh)	10,000mAh 3.85V (38.5Wh)
Rated Energy	5,600mAh 5V (TYP 3A)	5,600mAh 5V (TYP 3A)
Input	USB-C (IN1): 5V=2A / 9V=2A / 12V=1.5A (18W MAX) USB-C (IN2): 5V=2A / 9V=2A / 12V=1.5A (18W MAX)	USB-C: 5V=2.4A / 9V=2A
Output	USB-C (OUT1): 5V-3A / 9V-2.22A / 12V-1.87A (22.5W MAX) USB-C (OUT2): 5V-3A / 9V-2.22A / 12V-1.87A (22.5W MAX) Dual Ports: 5V-3A (MAX)	USB-C: 5V=3A / 9V=2.22A / 12V=1.68A USB-A: 5V=3A / 9V=2A / 12V=1.5A Dual Ports: 5V=3A (MAX)
Dimensions	122.0mm × 59.2mm × 10.6mm (4.80" × 2.33" × 0.42")	121.9mm × 59mm × 10.6mm (4.8" × 2.32" × 0.42")
Weight	150g±5g (5.29 oz±0.1 oz)	150g±5g (5.29 oz±0.1 oz)



# **NB Air**

## NB20000 Gen3

 $(4.65" \times 2.72" \times 0.85")$ 

Weight 291g±5g (10.26 oz±0.1 oz)

	Ultra Lightweight Carbon Fiber Power Bank	Ultra Lightweight Carbon Fiber Power Bank
Capacity	20,000mAh 3.6V (72Wh)	5,000mAh 3.88V (19.4Wh)
Rated Energy	11,220mAh 5V (TYP 3A)	3,300mAh 5V (TYP 2A)
Input	USB-C (IN1): 5V-3A / 9V-2A / 12V-1.5A (18W MAX) USB-C (IN2): 5V-3A / 9V-2A / 12V-1.5A (18W MAX)	USB-C: 5V=2.4A / 9V=2A (18W MAX)
Output	USB-C (OUT1): 5V-3A / 9V-2.22A / 12V-1.66A (22.5W MAX) USB-C (OUT2): 5V-2.4A / 9V-2A / 12V-1.5A (18W MAX) Dual Ports: 5V-3A (MAX)	USB-C: 5V-2.4A / 9V-2A / 12V-1.5A (18W MAX)
Dimensions	118.0mm × 69.0mm × 21.5mm	112.5mm × 48mm × 9.7mm





 $(4.43" \times 1.89" \times 0.38)$ 

90g±5g (3.17 oz±0.1 oz)

# **CARBO 10000**

## **CARBO 20000**

	Ultra Lightweight Carbon Fiber Power Bank	Ultra Lightweight Carbon Fiber Power Bank
Capacity	10,000mAh 3.85V (38.5Wh)	20,000mAh 3.85V (77Wh)
Rated Energy	6,400mAh 5V (TYP 1A)	13,500mAh 5V (TYP 2A)
Input	USB-C: 5V-2.4A / 9V-2A	USB-C: 5V=2.4A / 9V=2A
Output	USB-C: 5V-3A / 9V-2.22A / 12V-1.68A USB-A: 5V-3A / 9V-2A / 12V-1.5A Dual Ports: 5V-3A (MAX)	USB-C: 5V-3A / 9V-2.22A / 12V-1.68A USB-A: 5V-3A / 9V-2A / 12V-1.5A Dual Ports: 5V-3A (MAX)
Dimensions	124mm × 59mm × 11.5mm (4.88" × 2.32" × 0.45")	124mm × 60mm × 21.8mm (4.88" × 2.36" × 0.86")
Weight	157g±5g (5.54 oz±0.1 oz)	295.5g±5g (5.54 oz±0.1 oz)













#### **SUMMIT 10000 SUMMIT 20000**

	Low Temperature Resistant Carbon Fiber Power Bank	Low Temperature Resistant Carbon Fiber Power Bank
Capacity	10,000mAh 3.85V (38.5Wh)	20,000mAh 3.85V (77Wh)
Rated Energy	6,400mAh 5V (TYP 1A)	13,500mAh 5V (TYP 2A)
Input	USB-C: 5V=2.4A / 9V=2A	USB-C: 5V=2.4A / 9V=2A
Output	USB-C: 5V=3A / 9V=2.22A / 12V=1.68A USB-A: 5V=3A / 9V=2A / 12V=1.5A Dual Ports: 5V=3A (MAX)	USB-C: 5V=3A / 9V=2.22A / 12V=1.68A USB-A: 5V=3A / 9V=2A / 12V=1.5A Dual Ports: 5V=3A (MAX)
Dimensions	125.5mm × 63.5mm × 14.5mm (4.94" × 2.50" × 0.57")	124mm × 60mm × 21.8mm (4.88" × 2.36" × 0.86")
Weight	172g±5g (6.07 oz±0.1 oz)	303g±5g (10.69 oz±0.1 oz)





# NW5000

# **POCKET 10000**

	Carbon Fiber Magnetic Wireless Power Bank	Carbon Fiber Pocket Power Bank
Capacity	5,000mAh 3.85V (19.25Wh)	10,000mAh 3.85V (38.5Wh)
Rated Energy	3,000mAh 5V (TYP 1A)	6,200mAh 5V (TYP 3A)
Input	USB-C: 5V-2.4A / 9V-2A / 12V-1.5A	UCB-C Cable: 5V-3A / 9V-2A / 12V-1.5A (18W MAX) USB-C Port: 5V-3A / 9V-2A / 12V-1.5A (18W MAX)
Output	USB-C: 5V=2.4A / 9V=2.22A / 12V=1.67A Wireless: 5W / 7.5W / 10W / 15W	UCB-C Cable: 5V-3A / 9V-2.22A /12V-1.67A (20W MAX) USB-C Port: 5V-3A / 9V-2.22A / 12V-1.67A / 10V-2.25A (22.5W MAX) Total Output: 5V-3A (MAX)
Dimensions	67.2mm × 99.7mm × 10.6mm (2.65" × 3.93" × 0.42")	105mm × 70mm × 12.5mm (4.13" × 2.76" × 0.49")
Weight	120g±5g (4.23 oz±0.1 oz)	160g ±5g (5.64 oz±0.1 oz)



# NC10000

	Highland Power Bank
Capacity	10,000mAh 3.6V (36Wh)
Rated Energy	6,000mAh 5V (TYP 1A)
Input	USB-C: 5V=2.4A / 9V=2A
Output	USB-C: 5V-3A / 9V-2.22A / 12V-1.68A
Dimensions	89mm × 45.2mm × 22.6mm (3.50" × 1.78" × 0.89")
Weight	168.5g±3g (5.94oz±0.1oz)







	FSP100W	FSP100	FSP30
Unfolded Dimensions	1,294mm × 606mm × 5mm (50.9" × 23.9" × 0.2")	58cm × 143cm × 2.5cm (22.8" × 56.3" × 1.0")	295mm × 880mm × 4mm (11.61" × 34.65" × 0.16")
Folded Dimensions	385mm × 300mm × 45mm (15.2" × 11.8" × 1.8")	29cm × 34cm × 7cm (11.4" × 13.4" × 2.8")	295mm × 170mm × 45mm (11.61" × 6.69" × 1.77")
Weight	2.6kg (5.7 lbs)	2.1kg (4.6 lbs)	625g±5g (1.38 lbs±0.01 lbs)
Panel Number	8	8	4
Cell Efficiency	≥ 23%	24%	24%
Operating Current	DC Output 5.6A	DC Output 5.4A	/
Operating Voltage	DC Output 18V	DC Output 18V (MAX)	/
Total Output Power	100W (MAX)	100W (MAX)	30W (MAX)
Output Port	7.9*5.5mm	7.9*5.5mm, USB-A × 2, USB-C	USB-A × 2, USB-C
USB-A Output	/	Total 5V=3.1A	Total 5V=3.1A
USB-C Output	/	5V-3A / 9V-3A / 12V-3A / 15V-3A	5V=3A / 9V=2A



Extension Cable for Solar Panels 10m (33ft)



Parallel Cable for Solar Panels 5m (16ft)







# **EMR Series**

With the innovative heating system and safe activating method, the NITECORE EMR Series is specially designed for outdoor enthusiasts to repel mosquitoes or pests effectively. The EMR Series products are powered by the rechargeable Li-ion battery, minimizing the carbon footprint while providing users with a long-lasting protection zone.





#### **EMR Series**



# **Electronic Repeller**

Can be recharged at any time for long-term use while it is safe, green, and efficient





#### **Conventional Repeller**





#### Fuel Powered

There is a need to carry and replace fuel, which is high consumption, not eco-friendly, and unapproved by airlines.





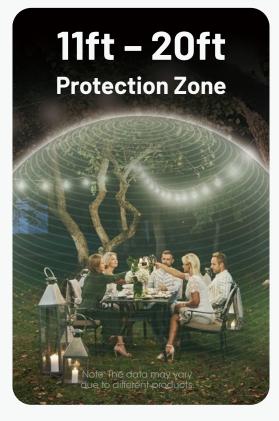

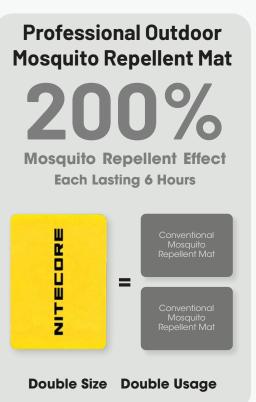



#### Portable Electronic Multipurpose Repeller

Dimensions: 167mm × 59.5mm × 33.5mm (6.6" × 2.3" × 1.3")



# MRM10 Professional Outdoor Mosquito Repellent Mats (Optional)



#### 180 Hours Mosquito Protection





**Heat Insulation Guard** 

Up to 6 Hours Each











	EMR10	EMR20	EMR30	EMR30 SE	EMR40
Electronic Mosquito Repeller	V	V	V	V	~
Max Protection Zone	16ft	16ft	20ft	16ft	16ft
Ultrasonic Function	V	×	V	×	Х
Battery Capacity	10,000mAh	12,000mAh	10,400mAh	Х	7,800mAh
Max Runtime	12h	12h	12h	×	10h
Power Supply	~	V	V	Х	×
OLED Display	V	Х	Х	Х	×
Weight	135g (4.76 oz)	227g (8 oz)	576g (20.3 oz)	86g (3.03 oz)	229g (8.08 oz)









	EMR06	EMR05	EMR06 TAC	EMR05 TAC
Electronic Mosquito Repeller	V	V	V	<b>v</b>
Max Protection Zone	16ft	16ft	16ft	16ft
Ultrasonic Function	×	Х	×	Х
Battery Capacity	1,800mAh	Х	1,800mAh	Х
Max Runtime	3.5h	Х	3.5h	Х
Power Supply	Х	Х	×	Х
OLED Display	×	Х	×	Х
Weight	71g (2.50 oz)	39g (1.38 oz)	98g (3.46 oz)	46g (1.62 oz)



2 Colors Available Floral White

Orchid Pink ()




	izzCool™ 10		izzC	ool™ 10	Pro	
Capacity	2,600mAh		4,000mAh		h	
Rated Input		5V=2A		5V-2A		
Rated Power		5W (MAX)			5W (MAX)	
Charging Time	1h 30min (5V/2A Adapter)		2h 30min (5V/2A Adapter)			
Moisture Output	80mL/h		80mL/h			
Rotational Speed	10,000 RPM (MAX)		10,000 RPM (MAX)			
Wind Speed	6.0 m/s (13.4 mph) (MAX)		6.0 n	n/s (13.4 mph) (1	MAX)	
Runtime	Cool Mist LOW	Cool Mist MID	Cool Mist HIGH	Cool Mist LOW	Cool Mist MID	Cool Mist HIGH
Rumme	7h	4h	2.5h	12.5h	7h	4.5h
Dimensions	138.0mm × 67.0mm × 60.0mm / 5.43" × 2.64" × 2.36" (Accessories Not Included)		5	m × 67.0mm × 60 .43" × 2.64" × 2.3 essories Not Inclu	6"	
Weight	139g (4.90 oz) (Accessories Not Included)		141g (4.97 oz	(Accessories N	lot Included)	
Accessories	Spare Bottle Adapter, Carry Pouch		Spare Bo	ttle Adapter, Ca	rry Pouch	

**Chill Your Summer** With a Bottle of Iced Water

**Enjoy Powerful Coolness Anytime, Anywhere** 



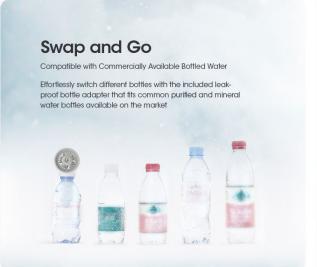





Weight: 97g / 3.42 oz

NEF02 SPEC	
Capacity	1,200mAh
Rated Input	5V=1A
Rated Power	5W (MAX)
Rotational Speed	4,500 RPM (MAX)



2 Colors Available







Handheld



Desktop Fan



4 Levels of Wind Speed



Curved LED Light

# NEF<sub>0</sub>3

#### Portable Handheld Fan

Dimensions: 213.0mm x 105.6mm x 38.0mm

 $(8.39" \times 4.16" \times 1.50")$ 

217g / 7.65 oz Weight:

NEFO3 SPEC	
Capacity	3,600mAh
Rated Input	5V=2A
Rated Power	10W (MAX)
Rotational Speed	3,900 RPM (MAX)
Wind Speed	34 km/h (21.1 mph) (MAX)





2 Colors Available









# NEF<sub>10</sub>

Output Power

#### **Multifunctional Electric Fan**

Dimensions: 194mm x 175mm x 345mm

 $(7.6" \times 6.9" \times 13.6")$ 

Height: 345mm / 13.6" (MAX)

275mm / 10.8" (MIN)

655g (±5g) / 23.10 oz (±0.18 oz) Weight:

NEF10 SPEC	
Capacity	10,000mAh
Rated Input	5V-2A
Input Power	5V-2A
Rated Power	4W (MAX)

5V=2A

CEOFE -



2 Colors Available







Headlamps

Flashlights

Other Lighting

Accessories

Photography

Carry Gear





# NEF20

#### Portable Bladeless Neck Fan

Dimensions: 219.7mm × 202.7mm × 63mm

 $(8.65" \times 7.98" \times 2.48")$ 

Weight: 304g±5g / 10.72 oz±0.1 oz

• 360° Air Supply Angle

• 170 L/min Max Airflow Rate

NEF20 SPEC	
Capacity	4,000mAh
Rated Input	5V-2A
Rated Power	4W MAX
Rotational Speed	3,900 RPM





# Small Size







	EBP10	EBP10 mini	
Input	5V=2A	5V-2A	
Rated Power	83W (MAX)	48W (MAX)	
Battery Capacity	8.88Wh (14.8V )	2.55Wh (11.1V )	
Pressure	144psi / 9.93bar (MAX)	120psi / 8.27bar (MAX)	
Runtime	600s	240s	
Dimensions 66.0mm × 38.0mm × 79.0mm (2.60" × 1.50" × 3.11")		65.0mm × 30.0mm × 65.0mm (2.56" × 1.18" × 2.56")	
Weight	280g / 9.88 oz (Nozzle Included)	140g / 4.94 oz (Nozzle Included)	
Accessories Base, Seal Part, Pillar, Cap		Base, Seal Part, Pillar, Cap, Silicone Protective Cover	

# Others

# **AP10**

#### **Ultra Compact Electric Air Pump**

Dimensions:  $80\text{mm} \times 56\text{mm} \times 51\text{mm}$ 

 $(3.15" \times 2.20" \times 2.01")$ 

Weight: 178g (6.28 oz)

4 Nozzles Included

Magnetic Tail Design

AP10 SPEC			
Input	5V=2A		
Rated Power	18	SW	
Battery Capacity	3,600mAh		
Inflation / Deflation	High Air Pressure	Low Air Pressure	
Pressure	±4.5 kPa	±2.2 kPa	
Airflow Rate	300 L/min	150 L/min	
Brightness	ness 300 Lumens MAX		













# **AD10**

#### **Professional Cord-Free Electric Air Duster**

Dimensions:  $176 \text{mm} \times 100 \text{mm} \times 50 \text{mm}$ (6.93" × 3.94" × 1.97")

Weight: 324g / 11.43 oz (Accessory Not Included)

AD10 SPEC				
Input	5V-2A / 9V-2A			
Rated Power	33.	6W		
Battery Capacity	28.86Wh			
Wind Speed	85km/h (MAX) 25km/h (MIN)			
Rotational Speed	30,000	O RPM		
Brightness	9 Lur	mens		















#### Portable USB-C Battery Charger

UI1 SPEC			
Compatible with	IMR / Li-ion		
Input	DC 5V/1A 5W		
Output voltage	4.2V±1%		
Output current	1,000mA (MAX)		







UI2 USB-C





#### Portable Dual-Slot USB-C Battery Charger

UI2 SPEC	
Compatible with	IMR / Li-ion
Input	DC 5V/2A 10W
Output voltage	4.2V±1%
Output current	1,000mA*2 (MAX)

#### **UI1 & UI2** Compatible with

IMR/Li-ion: 10340, 10350, 10440, 10500, 12340, 12500, 12650, 13450, 13500, 13650, 14430, 14500, 14650, 16500, 16340(RCR123), 16650, 17350, 17500, 17650, 17670, 18350, 18490, 18500, 18650, 20700, 21700, 22500, 22650, 25500, 26500, 26650



# UM2





UM2 SPEC	
Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	DC 5V/2A 9V/2A 18W (MAX)
Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	QC Mode: 1,500mA*2 (MAX) Standard Mode: 1,000mA*2 (MAX)



# UM4





	UM4 SPEC	
Ī	Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
-	Input	DC 5V/2A 9V/2A 18W (MAX)
-	Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
-	Output current	QC Mode: 1,500mA*1 (MAX), 1,500mA*2 (MAX), 750mA*4 (MAX) Standard Mode: 1,500mA*1 (MAX), 1,000mA*2 (MAX) 500mA*4 (MAX)

#### UM2 & UM4 Compatible with

IMR/Li-ion/LiFePO4: 10440, 14500, 14650, 16500, 16340 (RCR123), 16650, 17350, 17500, 17650, 17670, 17700, 18350, 18490, 18500, 18650, 18700, 20700, 21700, 22500, 22650, 25500, 26500, 26650, 26700 Ni-MH/Ni-Cd: AA, AAA, AAAA, C, D







UMS2 SPEC	
Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	DC 5V/2A 9V/2A 18W (MAX)
Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	QC Mode: 3,000mA *1 (MAX), 2,000mA *2 (MAX), Standard Mode: 2,000mA *1 (MAX), 1,000mA *2 (MAX)



# UMS4







# **UMS4 SPEC**

Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	DC 5V/2A 12V/1.5A 18W (MAX)
Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	QC Mode: 3,000mA *1 (MAX), 2,000mA *2 (MAX), 1,000mA*4 (MAX) Standard Mode: 2,000mA *1 (MAX), 1,000mA *2 (MAX), 5,00mA*4 (MAX)

#### **UMS4** Compatible with

IMR/Li-ion/LiFePO4: 10440, 14500, 14650, 16500, 16340 (RCR123), 16650, 17350, 17500, 17650, 17670, 17700, 18350, 18490, 18500, 18650, 18700, 20700, 21700, 22500, 22650, 25500, 26500, 26650, 26700 Ni-MH/Ni-Cd: AA, AAA, AAAA, C, D

Photography

Carry Gear

# SC4

# BATTERY SLOTS

#### Four-Slot Superb Charger

SC4 SPEC	
Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	AC 100-240V 50/60Hz 1A (MAX) 40W DC 12V 3A
Output voltage	Battery: 4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1% USB: 5V±5% 2.1A MAX
Output current	3A*2 (MAX) 1.5A*4

#### SC4 Compatible with

Li-ion/IMR/LiFePO4: 10440, 10500, 12340, 12500, 12650, 13450, 13500, 13650, 14350, 14430, 14500, 14650, 16500, 16340 (RCR123), 16650, 17350, 17500, 17650, 17670, 18350, 18490, 18500, 18650, 22500, 22650, 25500, 26500, 26650

Ni-MH/Ni-Cd: AA, AAA, AAAA, C, D

# NEW i2



#### **Dual-Slot Intellicharger**

NEW i2 SPEC	
Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	AC 100-240V 50/60Hz 0.25A (MAX) 8W DC 9~12V
Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	500mA × 2 / 1,000mA × 1



# NEW i4



#### Four-Slot Intellicharger

NEW i4 SPEC	
Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	AC 100-240V 50/60Hz 0.25A (MAX) 10W DC 9~12V 1A
Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	1.5A × 1 / 0.75A × 2 / 0.5A × 2 / 0.375A × 4



#### NEW i2 & NEW i4 Compatible with

Li-ion/IMR/LiFePO4: 10340, 10350, 10440, 10500, 12340, 12500, 12650, 13450, 13500, 13650, 14350, 14430, 14500, 14650, 16500, 16340 (RCR123), 16650, 17350, 17500, 17650, 17670, 18350, 18490, 18500, 18650, 22500, 22650, 25500, 26500, 26650

Flat-topped Batteries: 18700, 20700, 21700 Ni-MH/Ni-Cd: AA, AAA, AAAA, C, D





# **2** BATTERY SLOTS

#### Intelligent USB-C Dual-Slot Superb Charger

Ci2 SPEC	
Compatible with	IMR / Li-ion / Ni-MH / Ni-Cd
Input	5V-2A / 9V-2A / 12V-1.5A 18W (MAX)
Output voltage	4.2V±1% / 1.48V±1%
Output current	Fast Charge Mode: 3,000mA*1 MAX / 1,500mA*2 MAX Standard Mode: 2,000mA*1 MAX / 1,000mA*2 MAX







#### Intelligent USB-C Four-Slot Superb Charger

Ci4 SPEC	
Compatible with	IMR / Li-ion / Ni-MH / Ni-Cd
Input	5V-2A / 9V-2A / 12V-1.5A 18W (MAX)
Output voltage	4.2V±1% / 1.48V±1%
Output current	Fast Charge Mode: 3,000mA*1 MAX / 1,500mA*2 MAX/ 1,000mA*3 MAX / 750mA*4 MAX Standard Mode: 2,000mA*1 MAX / 1,000mA*2 MAX / 700mA*3 MAX / 500mA*4 MAX



#### Ci2 & Ci4 Compatible with

IMR/Li-ion: 10440, 14500, 14650, 16500, 16340 (RCR123), 16650, 17350, 17500, 17650, 17670, 17700, 18350, 18490, 18500, 18650, 18700, 21700, 22500, 22650, 25500, 26500, 26650, 26700 Ni-MH/Ni-Cd: AA, AAA, AAAA, C, D





**D2 Dual-Slot Digicharger** 

BAT	<b>TERY</b>
<b>STO.</b>	rs

D2 SPEC	
Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	AC 100-240V 50/60Hz 0.25A (MAX) DC 12V 1A
Output voltage	4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	500mA × 2

#### Four-Slot Digicharger




D2 & D4 Compatible with	D4 SPEC	
DZ & D4 Companible willi	Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Li-ion / IMR / LiFePO4: 26650, 22650, 18650, 17670, 18490, 18350, 17500,	Input	AC 100-240V 50/60Hz 0.35A (MAX) DC 12V 1A
14500, 16340 (RCR123), 10440	Output voltage	4.2V±1% / 3.7V±1% / 1.48V±1%
Ni-MH/Ni-Cd: AA, AAA, AAAA, C	Output current	375mA × 4 / 750mA × 2





# PHOTOGRAPHY ACCESSORIES



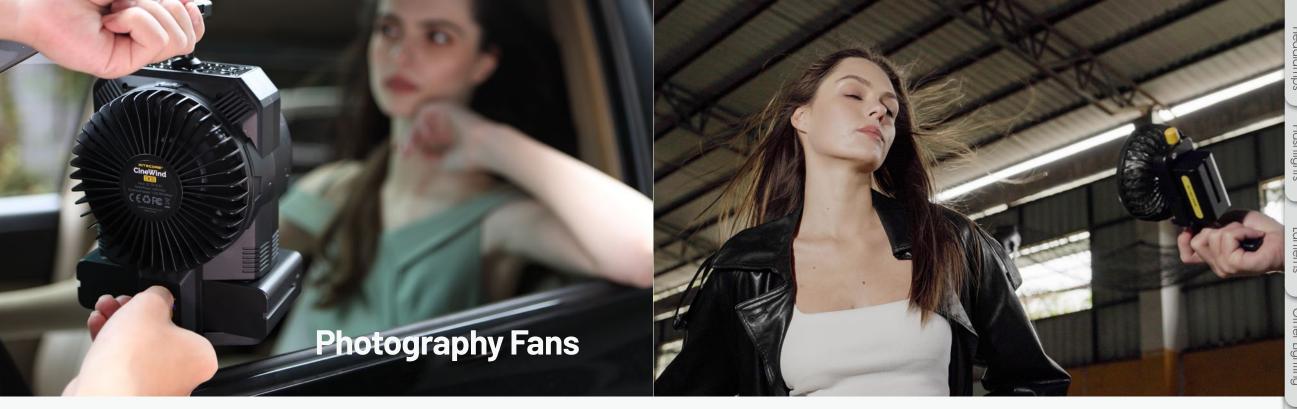





Pro. Proficient. Powerful.

**CW30** 



#### Portable Cord-Free Photography Fan

Powered by NP-F Batteries

Max Wind Speed of 46 km/h (28.6 mph)

10 Levels of Wind Speed

138h Max Runtime

Multiple Expansion Interface

Detachable Fan Covers

CW30 SPEC		
Input	DC 12V-16.8V	
Rated Power	42W (MAX)	
Rotational Speed	7,200 RPM (MAX)	
Wind Speed	46 km/h (28.6 mph) (MAX)	
Air Volume	400m³/h (MAX)	



\* Battery Not Included

**LED Display** 

# **CW10**

#### Portable Photography Fan

USB-C Powered / Powered by a NP-F Battery

Max Wind Speed of 50 km/h (31.1 mph)

53h 30min Max Runtime

1/4" Arri Locating Hole Available

Tangle-Free Stainless Steel Mesh (Patent NO.: ZL202321941206.5)

CW10 SPEC		
Battery Powered	6V-8.4V	
USB-C Input	5V=1A (Charging)	
03b-C IIIpui	9V=2A (Operating)	
Rated Power	Battery Powered: 32W (MAX)	
Raiea rowei	USB-C Input: 18W (MAX)	
Rotational Speed	11,000 RPM (MAX)	
Wind Speed	Battery Powered: 50 km/h (31.1 mph) (MAX)	
wii ia speea	USB-C Input: 40 km/h (24.9 mph) (MAX)	
Air Volume	180 m³/h (MAX)	





# **BB2**

#### **Electronic Photography Blower**

Max Wind Speed of 80 km/h (49.7 mph)

■■ Magnetic Quick Release Brush

2.7 kPa Dust Removal Wind Pressure

Lighting Function

Mode Dial



**USB-C** Rechargeable

BB2 SPEC		
Input	5V-2A	
Rated Power	33.6W	
Battery Capacity	7.2Wh	
Rotational Speed	30,000 RPM	
	TURBO: 80 km/h (49.7 mph)	
Wind Speed	OPTICAL: 55 km/h (34.2 mph)	
	SILENT: 30 km/h (18.6 mph)	

# **NIA001**

#### **High Density Filter**

Compatible with: BB2, BB21



# **NIA002**

#### Camera Body Cleaning Brush

Compatible with: BB2, BB21, BB Mini



# **NIA003**

#### **Lens Cleaning Brush**

Compatible with: BB2, BB21, BB Mini





# **NIA004**

#### **Best Cleaning Partners Multipurpose Cleaning Kit**

Compatible with: BB2, BB21













**NIA006** High Density Filter



Enhanced Cleaning Kit Vacuum Attachment Kit

# **BB** nano

#### Portable Versatile Electronic Blower

Max Wind Speed of 40 km/h (24.9 mph)

2.6 kPa Dust Removal Wind Pressure

4.8Wh Li-ion Battery

High Density Filter

Silicone Nozzle Design

**USB-C** Rechargeable

BB nano SPEC	
Input	5V-2A
Rated Power	30W
Battery Capacity	4.8Wh
Rotational Speed	40,000 RPM
Wind Speed	HIGH: 40 km/h (24.9 mph) LOW: 15 km/h (9.3 mph)



# **BB21**

#### **Electronic Photography Blower**

Max Wind Speed of 80 km/h (49.7 mph)

7.2Wh Li-ion Battery

Durable PC Material

Mode Indicators & Power Indicators

**Lockout Function** 

Magnetic Quick Release Brush

SILENT: 30 km/h (18.6 mph)

High Density Filter

USB-C Rechargeable



Sakura



Fun Green

# **BB Mini**

#### Portable Electronic Mini Photography Blower

Max Wind Speed of 65 km/h (40.4 mph)

■■ Magnetic Quick Release Brush

**\$\frac{1}{5}** 2 kPa Dust Removal Wind Pressure

8.88Wh Li-ion Battery

High Density Filter

USB-C Rechargeable

BB21 SPEC		_
Input	5V-2A	
Rated Power	33.6W	
Battery Capacity	7.2Wh	
Rotational Speed	30,000 RPM	
	TURBO: 80 km/h (49.7 mph)	
Wind Speed	OPTICAL: 55 km/h (34.2 mph)	Eur

**BB Mini SPEC** Input 5V=2A Rated Power 25W Battery Capacity 8.88Wh Rotational Speed 25,000RPM TURBO: 65 km/h (40.4 mph) Wind Speed SILENT: 35 km/h (21.7 mph)

Headlamps

# **Sensor Cleaning Swab Series**



#### **Mini Swabs**

For Mirrorless Cameras















## **Anti-fog Wipes**

Model: NC-CK007

- 24h Anti-fog Performance
- Extra Antibacterial Effects
- · Antistatic Formula
- Highly Volatile



#### **Cleaning Wipes**

Model: NC-CK008

- Excellent Cleaning Performance
- · Highly Volatile
- Mild Formula



#### **Anti-slip Touchscreen Cleaning Gloves**

Model: NC-CK009

- · Anti-slip Grip Dots
- Effective Touchscreen Capabilities
- Dust-free Individual Vacuum Packing



**Sensor Cleaning** Fluid Pro Model: NC-CK005



#### **Dust-free Cotton Swabs**

Model: NC-CK006

- Vacuum Packing
- Pointed Tip Design
- Sturdy and Lint-free





**Camera Batteries and Chargers** 





<b>&gt;</b>	UFZ100	NP-F970	NP-F750
Compatible Brand	SONY	SONY	SONY
Voltage	7.2V	7.2V	7.4V
Capacity	2,250mAh	7,800mAh	5,200mAh
Energy	16.2Wh	56.16Wh	38.5Wh





	USN3 PRO	USN4 PRO
Туре	Dual Slot USB-C QC Charger for SONY	Dual Slot USB-C QC Charger for SONY
Battery Slot	2	2
Charging Port	USB-C	USB-C
Input	DC 5V/2A or 9V/2A	DC 5V/2A or 9V/2A
Output Voltage	Slot 1 8.4V±1%	Slot 1 8.4V±1%
Output vollage	Slot 2 8.4V±1%	Slot 2 8.4V±1%
Output Current	QC Mode: 1,200mA*1 (MAX), 800mA*2 (MAX)	QC Mode: 1,200mA*1 (MAX), 800mA*2 (MAX)
·	Standard Mode: 1,000mA*1 (MAX)	Standard Mode: 1,000mA*1 (MAX)
Compatible With	NP-FM500H / NP-F730 / NP-F750 / NP-F770 / NP-F970 / NP-F550	NP-FZ100





	USN1	UCN2 PRO
Туре	USB Dual Slot Travel Charger for SONY Camera	Dual Slot USB QC Charger for CANON
Battery Slot	2	2
Charging Port	Micro USB	Micro USB
Input	DC 5V/2A	DC 5V/2A or 9V/2A
Output Voltage	Slot 1 8.4V±1%	Slot 1 8.4V±1%
	Slot 2 8.4V±1%	Slot 2 8.4V±1%
Output Current	1,000mA (MAX)	QC Mode: 1,200mA*1 (MAX), 800mA*2 (MAX)
	, ,	Standard Mode: 1,000mA*1 (MAX)
Compatible With	NP-FW50	LP-E6N, LP-E6P






	FX3	FX1
Туре	Dual Slot USB QC Charger for FUJIFILM	Dual Slot USB Charger for FUJIFILM
Battery Slot	2	2
Charging Port	USB-C	Micro USB
Input	DC 5V/2A or 9V/2A	DC 5V/2A
Output Voltage	Slot 1 8.4V±1%	Slot 1 8.4V±1%
Odipui volidge	Slot 2 8.4V±1%	Slot 2 8.4V±1%
Output Current	QC Mode: 1,500mA*1 (MAX), 1,000mA*2 (MAX)	1,000mA (MAX)
Ouipui Cuileili	Standard Mode: 1,000mA*1 (MAX), 500mA*2 (MAX)	1,000HA (MAX)
Compatible With	NP-W235	NP-W126 / NP-W126S





	UNK2	ULSL	
Туре	Dual Slot USB Charger for NIKON	USB Travel Charger for LEICA Camera	
Battery Slot	2	1	
Charging Port	Micro USB	Micro USB	
Input	DC 5V/2A	DC 5V/2A	
Output Voltage	Slot 1 8.4V±1%	Slot 8.4V+1%	
Output Voltage	Slot 2 8.4V±1%	5101 8.4V±1%	
Output Current	1,000mA (MAX)	1,000mA (MAX)	
Compatible With EN-EL15 / EN-EL15a / EN-EL15b		BP-SCL4	

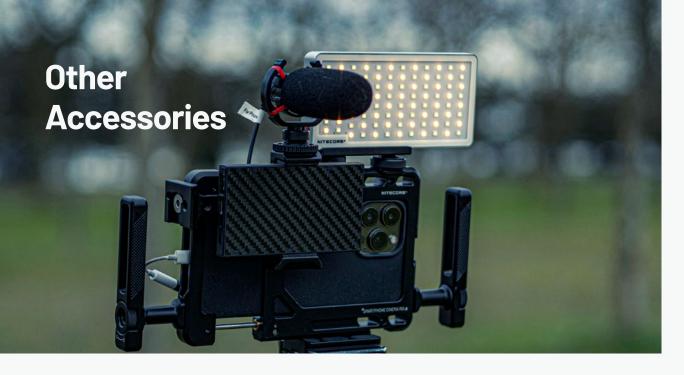

#### **Stick-it Wrapper**

Model: NC-ACC002



- Multifunctional Organizations
- Scratch Resistant

#### **Smartphone Cinema Rig**

Model: NCR10



- CNC Machining Aluminum Alloy
- Multiple Expansion Interfaces
- Quick Installation & Quick Release







- Dust and Moisture Proof
- Environmentally Friendly



- Vertical / Horizontal
- Multipurpose Phone Mount





TIPA World Awards 2021
Best Power Accessory

# SCL10 2-in-1 Smart Camera Light & Power Bank

SCL10 SPEC	
Color Temperature	2,500K-6,300K
Max Brightness Output	800 Lumens
Capacity	10,000mAh 3.85V (38.5Wh)
Input	USB-C: 5V=2.4A / 9V=2A 18W (MAX)
Output	USB-C: 5V=2.4A / 9V=2A / 12V=1.5A USB-A: 5V=2.4A / 9V=2A / 12V=1.5A 18W (MAX) Dual Ports: 5V=2.4A (MAX)







2,500K

4,400K

6,300K





LHH82 SPEC	
Input	5V-2A (MAX)
Input Port	USB-C
Operating Temperature	-40°C~40°C (-40°F~104°F)
Heating Temperature	45±5°C (113±9°F)
Compatible with	A filter size of 72~82mm



# ► BP Series

# **BP23 Pro**

#### **Multipurpose Commuting Backpack**

Capacity: 23L / 1,404 cu in

Dimensions: 47cm × 29cm × 15cm / 18.5" × 11.4" × 5.9"

Weight: 1,260g / 2.8 lbs

#### 23L (1,404 cu in) Large Capacity With 4 Compartments






500D CORDURA® Nylon Fabric



**3D Carrying System** 



Internal Fiberglass Stay

# **BP23**

#### **Multipurpose Commuting Backpack**


Weight: 1,030g / 2.3 lbs





# ► SLB Series



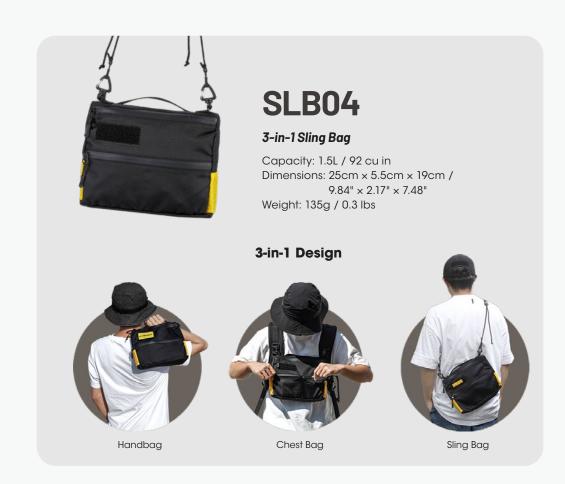

# SLB05

#### **Modular Commuting Sling Bag**

Capacity: 2L / 122 cu in

Dimensions: 22cm × 5cm × 16cm / 8.7" × 2.0" × 6.3"

Weight: 275g / 0.6 lbs



#### **Premium Material**

besigned in Collaboration with OVERCLOCK ROAM



UTX Duraflex



Cushion Foam

Two-way YKK Zippers

Buckles

Available in the sides, bottom, and back for shock resistance and impact resistance

Sling Bag



**Utility Pouch** 



Multiple Carrying Options



2 × MOLLE System Clips Included For attaching to other backpacks

# SLB06

#### **Commuting Crossbody Bag**

Capacity: 7L / 427 cu in

Dimensions: 35cm × 20cm × 8cm / 13.8" × 7.9" × 3.1"

Weight: 630g / 1.4 lbs



# ► NPP Series



NPP01 mini Outdoor Sacoche Bag

**▶** Waterproof Dry Bags



NPP01 Outdoor Sacoche Bag



Pocket Pouch

# ► NUP Series



NUP30 Multi-Purpose Utility Pouch



**WDB05** 



Secured Fastening System



Reliable Water Resistance

# ► Running Belt



					OUTPUT / RUNTIM	F			DEAK DEAM
M	ODEL	LED	TURBO	HIGH	MID	LOW	ULTRALOW	BEAM DISTANCE	PEAK BEAM INTENSITY
		4 x High	Red Indicator (Slow Flashing)	Red Light (Slow Flashing)	Red Light (Quick Flashing)	White Light (Slow Flashing)	White Light (Constant-on)		
	NU05 V2	Performance LEDs	-	4 Lumens	4 Lumens	40 Lumens	40 Lumens	-	-
			47h	10h	10h	4h	1h45min		
			IR Constant-on	Red Constant-on	Green Constant-on	Blue Constant-on	-		
			-	3 Lumens	8 Lumens	2 Lumens	-		
		4 x High	4h	9h	9h	5h	-		
	NU06 MI	Performance LEDs	IR Flashing	Red Flashing	Green Flashing	Blue Flashing	Red/Blue Police Warning Flashing	-	-
			-	3 Lumens	8 Lumens	2 Lumens	-		
			50h	75h	75h	48h	56h		
			Red Constant on	Green	Blue	White	-		
			Constant-on 3 Lumens	Constant-on 8 Lumens	Constant-on 2 Lumens	Constant-on 15 Lumens	_		
			9h	9h	5h	5h45min	_		
	NU06 LE	4 x High Performance	711	711	0.1	GIT TOTTIM!	Red/Blue	_	_
		LEDs	Red Flashing	Green Flashing	Blue Flashing	White Flashing	Police Warning Flashing		
			3 Lumens	8 Lumens	2 Lumens	15 Lumens	-		
			75h	75h	48h	54h	56h		
			Red Constant-on	Green Constant-on	Yellow Constant-on	White Constant-on	Blue Constant-on		
			3 Lumens	8 Lumens	9 Lumens	15 Lumens	2 Lumens	-	
		5 x High	10h	11h	11h	7h	6h		
	NU07 LE	Performance LEDs	Red Flashing	Green Flashing	Yellow Flashina	White Flashing	Blue Flashing	Red/Blue Police	-
			3 Lumens	8 Lumens				Warning Flashing	
ies					9 Lumens	15 Lumens	2 Lumens		
NU Series			50h	50h	50h	40h	40h	40h	
₹		-	-	White	-	-	-	50m	
	NU11		-	150 Lumens	45 Lumens	-	-	50m	596cd
			-	2h30min	6h	-	-		
	NULIOO			Primary W	/hite Light		Auxiliary White Light		
	NU20 Classic	-	360 Lumens	200 Lumens	38 Lumens	1 Lumens	20 Lumens	109m	2963cd
			2h	5h	7h	97h	7h		
					White Light				
	NU21	-	-	360 Lumens	170 Lumens	60 Lumens	6 Lumens	58m	840cd
			-	2h	3h30min	8h	37h		
					Mix				
			-	400 Lumens	200 Lumens	60 Lumens	-		
			-	2h40min	4h40min	10h25min	-		
					Spotlight				
	NU25/ NU25 UL	-	-	-	200 Lumens	60 Lumens	-	64m	1029cd
	NU25 UL		-	_	4h15min	10h30min	_		
					Floodlight				
			_	_	200 Lumens	60 Lumens	6 Lumens		
			-	_	4h15min	10h	45h		
			600 Lumens	400 Lumens	200 Lumens	70 Lumens	6 Lumens		
	NU27	MCT UHE LEDs						123m	3705cd
				3h	6h30min	13h	57h		
				rimary White Ligh			White Light		
	NU30	-	HIGH	MID	LOW	FLOOD LOW	ULTRALOW	130m	4062cd
			500 Lumens	200 Lumens	100 Lumens	50 Lumens	6 Lumens		
			4h	8h	24h	32h	97h		

WATERPROOF	BATTERY OPTIONS	DIMENSIONS	WEIGHT	MODEL
IP66	Built-in rechargeable Li-ion battery	LENGTH HEAD DIAMETER TAIL DIAMETER  29.75mm x 29.5mm x 16.42mm (1.17" x 1.16" x 0.65")	11.1g (0.39 oz)	NU05 V2
IP66	Built-in rechargeable Li-ion battery	29.5mm x 29.5mm x 25.4mm (1.16" x 1.16" x 1.00")	16.7g (0.59 oz)	NU06 MI
IP66	Built-in rechargeable Li-ion battery	29.5mm x 29.5mm x 25.4mm (1.16" x 1.16" x 1.00")	15.8g (0.56 oz)	NU06 LE
IP66	Built-in rechargeable Li-ion battery	61.8mm x 28.9mm x 21.7mm (2.43" x 1.14" x 0.85")	24.5g (0.86 oz)	NU07 LE
IPX5	Built-in rechargeable Li-ion battery	50.2mm x 59.1mm x 18.7mm (1.98" x 2.33 " x 0.74")	41g (1.45 oz)	NU11
IP66	Built-in rechargeable Li-ion battery	52.1mm x 33.1mm x 24.4mm ( 2.05" x 1.30" x 0.96")	38g (1.34 oz)	NU20 Classic
IP66	Built-in rechargeable Li-ion battery	60.1mm x 33.0mm x 25.5mm (2.37" x 1.30" x 1.00")	44g (1.55 oz)	NU21
	Built-in	NU25: 60.1mm x 36.8mm x 25.0mm (2.37" x 1.45" x 0.98")	NU25: 56g (1.98 oz)	
IP66	rechargeable Li-ion battery	NU25 UL: 60.1mm x 33.0mm x 25.5mm (2.37" x 1.30" x 1.00")	NU25 UL: 45g (1.59 oz)	NU25/ NU25 UL
IP66	Built-in rechargeable Li-ion battery	65.5mm x 33.9mm x 25.5mm (2.58" x 1.33" x 1.00")	56g (1.98 oz)	NU27
IP66	Built-in rechargeable Li-ion battery	62.3mm x 45.2mm x 31.0mm (2.45" x 1.78" x 1.22")	90g (3.17 oz)	NU30

NOTE: Runtime has been measured with the first battery type stated in battery options.

\* The runtime for Turbo/High mode is the testing result before starting temperature regulation.

				(	OUTPUT / RUNTIM	E			PEAK BEAM	
M	ODEL	LED	TURBO	HIGH	MID	LOW	ULTRALOW	BEAM DISTANCE	INTENSITY	
			550 Lumens	200 Lumens	60 Lumens	50 Lumens	6 Lumens			
	NU31	-	5h	8h	38h	42h	147h	145m	5800cd	
			700 Lumens	200 Lumens	60 Lumens	50 Lumen	6 Lumens			
	NU33	-	4h	9h	38h	47h	147h	135m	4578cd	
			Built-in Li-ion	460 Lumens	210 Lumens	38 Lumens	1 Lumen			
		CREE XP-G3	Battery	15min	4h	7h45min	170h			
	NU35	S3	3 x AAA	460 Lumens	210 Lumens	38 Lumens	1 Lumen	48m	580cd	
			Batteries	15min	6h	9h	170h			
			1000 Lumens	600 Lumens	300 Lumens	100 Lumens	8 Lumens			
	NU40	-	_	6h	10h	22h	120h	100m	2700cd	
			1400 Lumens	600 Lumens	300 Lumens	100 Lumens	8 Lumens			
	NU43	-	_	10h	15h	29h	165h	130m	3800cd	
NU Series					rimary White Ligh					
Sel			1700 Lumens	1000 Lumens	300 Lumens	100 Lumens	_			
2			1700 Editiens	8h	17h	34h				
	NU45	-	_		uxiliary White Ligi		_	172m	7426cd	
					uxiliary wrille Ligi		0.1			
			-	-	-	25 Lumens	8 Lumens			
			-	-	-	55h	86h			
	NU50	-	1400 Lumens	600 Lumens	300 Lumens	100 Lumens	8 Lumens	130m	3800cd	
			-	13h	20h	38h	200h			
	NU53 –	_			rimary White Ligh					
			1800 Lumens	1300 Lumens	400 Lumens	150 Lumens	-			
			-	-	-	9h	18h	37h	-	175m
			А	uxiliary White LigI	ht		176111	004100		
		-	-	-	25 Lumens	8 Lumens				
			-	-	-	66h	153h			
			TURBO		White	Light				
S			800 Lumens	500 Lumens	280 Lumens	100 Lumens	-			
UI series	UT27	_	2h 30min	3h30min	6h30min	14h30min	-	168m	7124cd	
7	0127		-		Warm	Light		100111	712400	
			-	500 Lumens	280 Lumens	100 Lumens	-			
			-	3h30min	6h30min	14h30min	-			
			1	240 Lumens	-	60 Lumens	6 Lumens			
	11422		1xAA	4h	-	11h	75h	00	0000	
	HA11	UHE LED		240 Lumens	-	60 Lumens	6 Lumens	90m	2030cd	
			1xNL1411R	7h	-	18h	126h			
				350 Lumens	-	100 Lumens	6 Lumens			
şrie;			3xAAA	3h	-	12h	140h			
o O	HA13	_		350 Lumens	-	100 Lumens	6 Lumens	120m	3500cd	
۵m			1xHLB1300	4h30min	-	15h	160h			
Headlamp Series				-	200 Lumens	100 Lumens	6 Lumens			
Ĭ			1xAA	-	4h	9h	82h			
	HA15 UHE	UHE LED		400 Lumens	200 Lumens	100 Lumens	6 Lumens	80m	1931cd	
			1xNL1411R	3h30min	5h	10h30min	114h		73160	
				OFFICIALITY	511	101100111111	11-411			
		CREE XHP35	1800 Lumens	780 Lumens	240 Lumens	70 Lumens	1 Lumen			

WATERPROOF	BATTERY OPTIONS		DIMENSIONS		WEIGHT	MOD	EL
	Built-in	LENGTH	HEAD DIAMETER	TAIL DIAMETER			
IP66	rechargeable Li-ion battery		62.3mm x 46.0mm x 35.6mm (2.45" x 1.81" x 1.40")		95.5g (3.37 oz)	NU31	
IP66	Built-in rechargeable Li-ion battery		62.3mm x 46.0mm x 35.6mm (2.45" x 1.81" x 1.40")		95.5g (3.37 oz)	NU33	
IP66	Built-in rechargeable Li-ion battery + 3xAAA		61.3mm x 48.5mm x 45.6mm (2.41" x 1.91" x 1.80")		79.5g (2.8 oz)	NU35	
IP68	Built-in rechargeable Li-ion battery		79.8mm x 46.1mm x 43.9mm (3.14" x 1.81" x 1.73")		116g (4.09 oz)	NU40	
IP68	Built-in rechargeable Li-ion battery		79.8mm x 46.1mm x 43.9mm (3.14" x 1.81" x 1.73")		116g (4.09 oz)	NU43	S
IP68	Built-in rechargeable Li-ion battery		79.0mm x 39.5mm x 49.8mm (3.11" x 1.56" x 1.96")		126g (4.44 oz)	NU45	NU Series
IP68	Built-in rechargeable Li-ion battery		83.4mm x 48.5mm x 43.9mm (3.28" x 1.91" x 1.73")		146g (5.15 oz)	NU50	
IP68	Built-in rechargeable Li-ion battery		83.4mm x 48.5mm x 43.9mm (3.28" x 1.91" x 1.73")		151g (5.33 oz)	NU53	
IP66	1xHLB1500 / 3xAAA		56.0mm x 46.6mm x 32.0mm (2.20" x 1.83" x 1.26")		74g (2.61 oz)	UT27	UT Series
IP66	1xAA / 1x14500		61.5mm x 36.2mm x 28.9mm (2.42" x 1.43" x 1.14")		38g (1.34 oz)	HAII	
IPX6	3xAAA / 1xHLB1300		59.0mm x 50.0mm x 36.0mm (2.32" x 1.97" x 1.42")		67g (2.36 oz)	HA13	Headlamp Series
IP66	1xAA / 1x14500		67.4mm x28.6mm x 33.4mm (2.65" x 1.13" x 1.31")		43g (1.52 oz)	HA15 UHE	Неас
IP68	1x18650 / 1xlMR18650 / 2xCR123 / 2xRCR123	105.3mm (4.15")	25.5mm x 24.2mm (1.00" x 0.95")	23.8mm (0.94")	51.2g (1.81oz)	HC33	

NOTE: Runtime has been measured with the first battery type stated in battery options.

\* The runtime for Turbo/High mode is the testing result before starting temperature regulation.

				C	OUTPUT / RUNTIM	E			PEAK BEAM
N	ODEL	LED	TURBO	HIGH	MID	LOW	ULTRALOW	BEAM DISTANCE	INTENSITY
		4 x CREE XP-	2700 Lumens	800 Lumens	270 Lumens	40 Lumens	1 Lumen		
	HC35	G3 S3	*45min	3h	8h15min	52h	1200h	134m	4500cd
			1600 Lumens	1000 Lumens	400 Lumens	100 Lumens	8 Lumens		
	HC60 UHE	UHE LED	3h30min	5h	14h	36h	200h	157m	6170cd
					rimary White Ligh				
			2000 Lumens	1300 Lumens	400 Lumens	100 Lumens	_		
ries	HC65 UHE	UUELED	2h	5h	14h	31h	_		
Headlamp Series	/ HC65M UHE	UHE LED			uxiliary White Lig			222m	12293cd
amp	0112		_	_	_	40 Lumens	8 Lumens		
adlo			_	_	_	40h	82h		
ΗŒ			1600 Lumens	1000 Lumens	500 Lumens	150 Lumens	8 Lumens		
HC70 UH	HC70 UHE	UHE LED	5h	8h	18h	38h	220h	156m	6112cd
			2000 Lumens	1000 Lumens	400 Lumens	180 Lumens	20 Lumens		
			9h	11h	17h	31h30min	66h		
	HU2000	UHE LED		1000 Lumens	400 Lumens	180 Lumens	20 Lumens	160m	6400cd
		_							
			-	6h	10h	20h	42h		
	EDC23	2 x UHi 25	2500 Lumens	1100 Lumens	200 Lumens	65 Lumens	15 Lumens	280m	20720cd
		LEDs	-	1h30min	3h45min	11h	39h		
	EDC25	2 x UHi 20	3000 Lumens	1000 Lumens	200 Lumens	65 Lumens	15 Lumens	300m	22500cd
	LDC23	LEDs	-	1h30min	4h15min	14h	55h	300111	2230000
	ED 007 1111	2 x UHi 20	3100 Lumens	1100 Lumens	200 Lumens	65 Lumens	15 Lumens	305m	23500cd
	EDC27 UHi	LEDs	-	1h35min	4h20min	14h	55h	303111	2550000
	EDC29 2 x UHi 20 MAX LEDs	LUMIN SHIELD™   SEARCH	-	-	-	-	400m		
es		6500   3000 Lumens   Lumens	1200 Lumens	400 Lumens	100 Lumens	15 Lumens		40230cd	
EDC Series			- -	2h	3h	13h	61h		
ဂ္ဂ			LUMIN SHIELD™   SEARCH	-	-	-	-		
ш	EDC31	UHi 20 MAX LED	3500   1500 Lumens   Lumens	1100 Lumens	300 Lumens	70 Lumens	5 Lumens	380m	35630cd
			- -	4h	5h	24h	57h		
			LUMIN SHIELD™   SEARCH	-	-	-	-		
	EDC33	UHi 20 MAX LED	4000   1700 Lumens   Lumens	1200 Lumens	300 Lumens	70 Lumens	5 Lumens	450m	54500cd
			-1-	2h31min	6h58min	31h	63h		
			LUMIN SHIELD™   SEARCH	-	-	-	-		
	EDC35	UHi 40 MAX LED	5000   3000 Lumens   Lumens	1300 Lumens	300 Lumens	70 Lumens	5 Lumens	550m	75700cd
			- -	4h45min	9h15min	40h	90h		
			LUMIN SHIELD™   SEARCH	-	-	-	-		
ries	TM9K Pro	3 x UHi 40 MAX LEDs	9900   6000 Lumens   Lumens	2000 Lumens	500 Lumens	130 Lumens	30 Lumens	510m	65400cd
r Se		1111 01 2200	- -	3h	4h	17h	65h		
nste	TN 43-014	6 x CREE	12000 Lumens	1000 Lumens	300 Lumens	100 Lumens	6 Lumens	050	15400
Tiny Monster Series	TM12K	XHP50	-	*2h15min	7h30min	20h	200h	250m	15600cd
	-,	19 x CREE	20000 Lumens	3100 Lumens	1900 Lumens	1050 Lumens	320 Lumens		05
	TM20K	XP-L2 HD	-	*45min	1h45min	4h15min	13h	290m	22200cd
Se		Luminus SST-	-	1800 Lumens	280 Lumens	35 Lumens	-		
Serie	P10i	40-W	-	2h30min	11h	50h	-	290m	21100cd
ise			4000 Lumens	1700   850 Lumens   Lumens	300 Lumens	50 Lumens	2 Lumens		
Precise Series	P10iX	4 x CREE XP-L2 V6						158m	6250cd
P			*30min	2h   2h30min	7h15min	38h	350h		

			DIMENSIONS				
WATERPROOF	BATTERY OPTIONS	LENGTH	HEAD DIAMETER	TAIL DIAMETER	WEIGHT	MODI	EL
IP68	1x21700 / 1x18650 / 2xCR123 / 2xRCR123	128.2mm (5.05")	28.85mm x 31.77mm (1.14" x 1.25")	28.3mm (1.11")	100g (3.53 oz)	HC35	
IP68	1x18650		80.0mm x 42.0mm x 48.5mm (3.15" x 1.65" x 1.91")		140g (4.94 oz)	HC60 UHE	
IP68	1x18650	HC65	5 UHE : 89.5mm x 42.2mm x 46.0 (3.52" x 1.66" x 1.81")	0mm	HC65 UHE : 152g (5.36 oz)	HC65 UHE	series
		HC65I	M UHE : 90.1mm x 51.5mm x 45. ( 3.55" x 2.03" x 1.78")	2mm	HC65M UHE : 143g (5.04 oz)	UHE	Headlamp Series
IP68	1x21700		84.0mm x 45.2mm x 50.5mm (3.31" x 1.78" x 1.99")		172g (6.07 oz)	HC70 UHE	I
IP68	1xNB10000 Gen3		80.0mm x 41.9mm x 26.1mm		114g (4.02 oz)	HU2000	
11 00	1xCarbon Battery™ 6K		(3.15" x 1.65" x 1.03")		1149 (4.02 02)	1102000	
IP54	Built-in rechargeable Li-ion battery	102.8mm (4.05")	33.0mm (1.30") (Width)	22.5mm (0.89") (Height)	101g (3.56 oz)	EDC23	
IP54	Built-in rechargeable Li-ion battery	136.3mm (5.37")	31.4mm (1.24") (Width)	21.4mm (0.84") (Height)	104g (3.67 oz)	EDC25	
IP54	Built-in rechargeable Li-ion battery	135.3mm (5.33")	31.4mm (1.24") (Width)	22.2mm (0.87") (Height)	122g (4.30 oz)	EDC27 UHi	
IP54	Built-in rechargeable Li-ion battery	133.5mm (5.26")	34.6mm (1.36") (Width)	22.5mm (0.89") (Height)	160g (5.64 oz)	EDC29	EDC Series
IP68	Built-in rechargeable Li-ion battery	113.2mm (4.46")	23.0mm (0.91")	22.6mm (0.89")	100g (3.53 oz)	EDC31	EDC
IP68	Built-in rechargeable Li-ion battery	115.6mm (4.55")	25.4mm (1.00")	24.0mm (0.94")	127g (4.48 oz)	EDC33	
IP68	Built-in rechargeable Li-ion battery	124.3mm (4.89")	31.8mm (1.25°)	26.0mm (1.02")	178g (6.28 oz)	EDC35	
IP68	Built-in rechargeable Li-ion battery	133.0mm (5.24")	40.0mm (1.57")	28.0mm (1.10")	227g (8.01 oz)	TM9K Pro	r Series
IP68	Built-in rechargeable Li-ion battery		108.0mm x 41.0mm x 31.0mm (4.25" x 1.61" x 1.22")		233g (8.22 oz)	TM12K	Tiny Monster Series
IP68	Built-in rechargeable Li-ion battery	145.5mm (5.73")	50.0mm (1.97")	50.0mm×26.0mm (1.97"×1.02")	422g (14.89 oz)	TM20K	Tin
IP68	1x21700i / 2xCR123 / 2xRCR123	147.0mm (5.79")	25.4mm (1.00")	28.5mm (1.12")	84g (2.96 oz)	P10i	Precise Series
IP68	1x21700i / 2xCR123 / 2xRCR123	137.2mm (5.40")	25.4mm (1.00")	28.5mm (1.12")	79.5g (2.80 oz)	P10iX	Precise

NOTE: Runtime has been measured with the first battery type stated in battery options.

\* The runtime for Turbo/High mode is the testing result before starting temperature regulation.

				(	OUTPUT / RUNTIN	IE			PEAK BEAM
N	IODEL	LED	TURBO	HIGH	MID	LOW	ULTRALOW	BEAM DISTANCE	INTENSITY
			-	HIGH (M1/M2/M3)	MID (M3)	MID (M2)	LOW (M3)		
	P10 V2	CREE XP-L2 V6	-	1100 Lumens	370 Lumens	200 Lumens	60 Lumens	201m	10150cd
			-	1h	2h	3h	14h		
	D00:14	4 x CREE XP-L2	4000 Lumens	1700   850 Lumens   Lumens	300 Lumens	50 Lumens	2 Lumens	001	10000
	P20iX	V6	*30min	2h   2h30min	7h15min	38h	350h	221m	12200cd
	P20i UV	Luminus SST-	-	1800 Lumens	250 Lumens	35 Lumens	-	337m	28500cd
	P201 0 V	40-W	-	1h45min	8h30min	38h	-	33/111	26500CG
			-	HIGH (M1/M2/M3)	MID (M3)	MID (M2)	LOW (M3)		
S	P20UV V2	CREE XP-L2 V6	-	1000 Lumens	330 Lumens	180 Lumens	60 Lumens	164m	6700cd
erie			-	2h30min	7h	16h	46h		
Precise Series	P23i	Luminus SFT-	3000 Lumens	1500 Lumens	800 Lumens	250 Lumens	50 Lumens	470m	55300cd
reci	1 201	70	*30min	2h30min	4h	10h	45h	470111	30300Cu
Д	P30i	CREE XHP35	2000 Lumens	1000 Lumens	385 Lumens	85 Lumens	6 Lumens	1000m	250000cd
	1 301	HI	*30min	1h30min	4h	18h	100h	1000111	25000000
	NEW P30	CREE XP-L HI	1000 Lumens	400 Lumens	220 Lumens	70 Lumens	1 Lumen	618m	95500cd
	INEW 130	V3	*1h15min	4h	7h	23h	950h	010111	75500CG
					Flood Mode				
		6 x CREE XP- G3	*3000 Lumens	1000 Lumens	300 Lumens	70 Lumens	10 Lumens		
	P35i		45min	2h	6h45min	28h	60h	1650m	678000cd
					Spot Mode			1000111	078000Cd
		Class 1 LEP	410 Lumens	200 Lumens	130 Lumens	65 Lumens	25 Lumens		
			2h15min	3h	4h30min	8h	12h		
Smart Ring	SRT7i	Luminus SFT-	3000 Lumens	-	-	100 Lumens	0.1 Lumens	580m	87500cd
Sr		70	3h15min	-	-	-	800h		
	MH10 V2	CREE XP-L2 V6	-	1200 Lumens	300 Lumens	55 Lumens	1 Lumen	202m	10200cd
			-	3h45min	8h	46h	1500h		
	MH11	CREE XP-L2 V6	1000 Lumens	230 Lumens	50 Lumens	3 Lumens	-	190m	9150cd
S			2h15min	4h15min	20h45min	250h	-		
erie	MH12 Pro	UHi 40 LED	3300 Lumens	1200 Lumens	300 Lumens	50 Lumens	1 Lumen	505m	63500cd
<b>Hybrid Series</b>			*30min	4h30min	8h30min	50h	650h		
łybr	MH15	Luminus	2000 Lumens	350 Lumens	50 Lumens	5 Lumens	-	250m	15850cd
		SST40	*45min	6h30min	24h	200h	-		
Multitask	MH25 Pro	UHi 40 LED	3300 Lumens	1200 Lumens	300 Lumens	50 Lumens	1 Lumen	705m	124300cd
ML			*30min	2h30min	7h30min	50h	650h		
			3500 Lumens	1300 Lumens	400 Lumens	80 Lumens	-		
	MH40 Pro	UHi 40 MAX	*45min	4h15min	13h	62h	-	1300m	423000cd
		LED	2000 Lumens	1200 Lumens	400 Lumens	80 Lumens	-		
			*1h	4h15min	15h	65h	-		
sk			1xNL1411R	*800 Lumens	300 Lumens	50 Lumens	-		
ulti-Ta: Series	MT1A Pro	UHi 25 LED		1h	1h45min	10h	-	250m	15700cd
Multi-Task Series			1xAA	-	200 Lumens	50 Lumens	-		
				-	1h30min	5h	-		

WATERPROOF	BATTEDY OPTIONS		DIMENSIONS		WEIGHT	1400	
WATERPROOF	BATTERY OPTIONS	LENGTH	HEAD DIAMETER	TAIL DIAMETER	WEIGHT	MOD	EL .
IP68	1x18650 / 2xCR123 / 2xRCR123	148.3mm (5.84")	25.4mm (1.00°)	26.0mm (1.02")	95g (3.35 oz)	P10 V2	
IP68	1x21700i / 2xCR123 / 2xRCR123	141.5mm (5.57")	31.8mm (1.25")	28.5mm (1.12")	116g (4.09 oz)	P20iX	
IP68	1x21700i / 2xCR123 / 2xRCR123	150.5mm (5.93")	31.8mm (1.25")	28.5mm (1.12")	124g (4.37 oz)	P20i UV	
IP68	1x18650 / 2xCR123 / 2xRCR123	151.2mm (5.95")	31.8mm (1.25")	26.0mm (1.02")	133.5g (4.71 oz)	P20UV V2	əries
IP68	1x21700i	143.5mm (5.65")	31.8mm (1.25")	28.5mm (1.12")	114.5g (4.04 oz)	P23i	Precise Series
IP68	1x21700i / 2xCR123 / 2xRCR123	177.5mm (6.99")	65.0mm (2.56")	28.5mm (1.12")	255.5g (9.01 oz)	P30i	ā
IP68	1x21700 / 1x18650 / 2xCR123 / 2xRCR123	155.5mm (6.12")	50.0mm (1.97")	27.2mm (1.07")	158.5g (5.59 oz)	NEW P30	
IP68	1x21700i / 2xCR123 / 2xRCR123	186.9mm (7.36°)	65.0mm (2.56°)	28.0mm (1.10°)	296.6g (10.46 oz)	P35i	
IP68	1x21700i / 2xCR123 / 2xRCR123	163.0mm (6.42")	40.0mm (1.57")	31.0mm (1.22")	175g (6.17 oz)	SRT7i	Smart Ring
IP68	1x21700 / 1x18650 / 2xCR123 / 2xRCR123	147.0mm (5.79")	25.4mm (1.00")	27.2mm (1.07")	77.5g (2.73 oz)	MH10 V2	
IP68	1x18650 / 2xCR123 / 2xRCR123	128.3mm (5.05")	24.0mm (0.94")	24.0mm (0.94")	60.5g (2.13 oz)	MH11	
IP68	1x21700	138.5mm (5.45")	26.8mm (1.06")	27.0mm (1.06")	82g (2.89 oz)	MH12 Pro	Hybrid Series
IP68	Built-in rechargeable Li-ion battery	117.0mm (4.61")	30.0mm (1.18")	27.4mm (1.08")	140g (4.94 oz)	MH15	
IP68	1x21700	153.6mm (6.05")	40.0mm (1.57")	27.0mm (1.06")	130g (4.59 oz)	MH25 Pro	Multitask
ID ( )	1xNBP100R	0F/ 0mm (30 00°)	45 Omne 40 545	07.0	417 (24-72	MILIO	
IP68	2x21700	256.0mm (10.08")	65.0mm (2.56")	27.0mm (1.06")	417g (14.71 oz)	MH40 Pro	
IP68	1x14500/ 1xAA	93.0mm (3.66")	19.7mm (0.78")	19.5mm (0.77")	32g (1.13 oz)	MT1A Pro	Multi-Task Series

NOTE: Runtime has been measured with the first battery type stated in battery options.

\* The runtime for Turbo/High mode is the testing result before starting temperature regulation.

	MODEL	LED		(	OUTPUT / RUNTIN	IE		BEAM DISTANCE	PEAK BEAM
Ţ,		LLD	TURBO	HIGH	MID	LOW	ULTRALOW	DEAM DIGIANCE	INTENSITY
			1xNL1816R	1000 Lumens	-	50 Lumens	-		
			TAIVETOTOR	1h15min	-	16h	-		
	MT1C Pro	UHi 20 LED	1xRCR123	800 Lumens	-	50 Lumens	-	360m	32500cd
	WITC PIO	UHI 20 LED	TXRCR123	45min	-	12h	-	300111	32300CG
			1CD102	500 Lumens	-	50 Lumens	-		
			1xCR123	1h	-	9h15min	-		
			1.AU 1414D	1000 Lumens	300 Lumens	50 Lumens	-		
	MT2A Pro	1111 00 1ED	1xNL1416R	1h30min	2h45min	20h	-	055	1/500 - 1
	IVIIZA PIO	UHi 20 LED	0.44	-	500 Lumens	60 Lumens	-	255m	16500cd
siles			2xAA	-	2h	11h	-		
Multi-Iask Series			3.4430075	1800 Lumens	-	50 Lumens	-		
ő			1xNL1836R	2h15min	-	28h	-		
				800 Lumens	-	50 Lumens	-		4700
2	MT2C Pro	UHi 20 LED	2xRCR123	1h30min	-	12h	-	520m	67000cd
				800 Lumens	-	50 Lumens	-		
			2xCR123	2h45min	-	20h	-		
			-	180 Lumens	45 Lumens	4 Lumens	-		
	MT06MD	Nichia 219B	_	45min	5h15min	35h	_	58m	860cd
		CREE XM-L2	920 Lumens	500 Lumens	180 Lumens	70 Lumens	1 Lumen		
	MT10C	U2	30min	45min	1h45min	5h	120h	190m	9000cd
		CDEE VILLID	1000 Lumens	400 Lumens	190 Lumens	50 Lumens	1 Lumen		
	MT21C	CREE XP-L HD V6	*1h	3h45min	7h30min	25h	700h	184m	8500cd
			_	900 Lumens	_	200 Lumens	_		
	NPL25	UHi 20 LED	_	35min	_	1h15min	_	225m	16000cd
Ď			111011		HIGH + GREEN	LOW + GREEN	ODEEN LAGED		
5		UHi 25 LED	HIGH	LOW	LASER	LASER	GREEN LASER		
NPL series	NPL25 GL		900 Lumens	120 Lumens	900 Lumens + Green Laser < 5mW	120 Lumens + Green Laser < 5mW	<5mW		11900cd
			43min	1h30min	43min	1h30min	10h		
		2 x High	_	85 Lumens	30 Lumens	2 Lumens	_		
	Thumb	Performance LEDs		45min	2h15min	22h	_	26m	170cd
		2 x High	45 Lumens	45(1)(1)	21113111111	-	_		
	Thumb LEO	Performance		_	_		_	24m	150cd
	TINI2/	LEDs	2h 500 Lumens	200 Lumons	- 65 Lumens	- 15 Lumons	1 Lumon		
	TINI2 SS/	2 x OSRAM P8	*15min	200 Lumens 45min	2h30min	15 Lumens 8h	1 Lumen 60h	89m	2000cd
	TINI2 Ti				65 Lumens				
	T4K	4 x CREE XP-L2 V6	4000 Lumens	200 Lumens		15 Lumens	1 Lumen	209m	10900cd
		High	-	2h45min	7h	21h	67h		
Series	TUBE V2.0	Performance	-	55 Lumens	-	1 Lumen	-	25m	156cd
Se Se	TIKI/TIKI LE/	LED	-	1h15min	-	58h	-		
	TIKI GITD/ TIKI GITD	OSRAM P8	-	300 Lumens	60 Lumens	15 Lumens	1 Lumen	71m	1260cd
	BLUE		-	30min	1h	4h	40h		
		Luminus SST-		V	AUX 1				
	TIKI UV	10-UV	1000mW	180mW	70 Lumens	35 Lumens	-	-	-
			1h	2h	30min	1h			
	TIP SE	2 x OSRAM P8	700 Lumens	180 Lumens	30 Lumens	1 Lumen	-	90m	2100cd
			*15min	1h30min	8h	50h	-		
	TIP2	2 x CREE XP-	720 Lumens	200 Lumens	30 Lumens	1 Lumen	-	93m	2160cd
		G3 S3	*15min	1h15min	8h	55h	-		

			DIMENSIONS				
WATERPROOF	BATTERY OPTIONS	LENGTH	HEAD DIAMETER	TAIL DIAMETER	WEIGHT	MODI	EL
IP68	1x18350 / 1xRCR123 / 1xCR123	88.0mm (3.46°)	26.8mm (1.06°)	24.4mm (0.96°)	53g (1.87 oz)	MT1C Pro	
IP68	1x14500 / 2xAA	142.8mm (5.62")	19.7mm (0.78°)	19.5mm (0.77")	40g (1.41 oz)	MT2A Pro	eries
IP68	1x18650/ 2xRCR123 /2XCR123	117.5mm (4.63")	26.8mm (1.06°)	24.4mm (0.96°)	64g (2.26 oz)	MT2C Pro	Multi-Task Series
IPX8	2xAAA	128.0mm (5.04")	14.0mm (0.55")	14.0mm (0.55")	22g (0.78 oz)	MT06MD	
IPX8	1xlMR18350 / 1xCR123/1xRCR123	91.2mm (3.59")	25.4mm (1.00")	25.4mm (1.00")	57g (2.01 oz)	MT10C	
IPX8	1x18650 / 2xCR123 / 2xRCR123	131.0mm(5.15")	25.4mm (1.00")	25.4mm (1.00")	103.5g (2.55 oz)	MT21C	
IPX6	1xLi-ion Battery		56.0mm x 33.0mm x 32.0mm (2.20" x 1.30" x 1.26")		66g (2.33 oz)	NPL25	S
IPX6	1xLi-ion Battery	62.0mm x	33.0mm x 32.0mm (2.44" x 1.3	90" x 1.26")	74g (2.61 oz)	NPL25 GL	NPL Series
IP65	Built-in rechargeable Li-ion battery	74.0mm (2.91") (Length)	24.0mm (0.94") (Width)	15.8mm (0.62") (Depth)	25g (0.88 oz)	Thumb	
IP65	Built-in rechargeable Li-ion battery	74.0mm (2.91") (Length)	24.0mm (0.94") (Width)	15.8mm (0.62") (Depth)	25g (0.88 oz)	Thumb LEO	
IP54	Built-in rechargeable Li-ion battery		46.6mm x 25.0mm x 12.5mm (1.83" x 0.98" x 0.49")		TINI2: 18.8g (0.66 oz) TINI2 SS: 26g (0.92 oz) TINI2 Ti: 21.5g (0.76 oz)	TINI2/ TINI2 SS/ TINI2 Ti	
IP54	Built-in rechargeable Li-ion battery		82.3mm x 30.0mm x 29.2mm (3.24" x 1.18" x 1.15")		77g (2.72 oz)	T4K	
IP65	Built-in rechargeable Li-ion battery	56.5mm (2.22") (Length)	21.0mm (0.83") (Width)	8.0mm (0.31") (Depth)	9.6g (0.34 oz)	TUBE V2.0	T Series
IP66	Built-in rechargeable Li-ion battery	55.0mm (2.17")	14.7mm (0.58")	-	TIKI/TIKI GITD/TIKI GITD BLUE: 12g (0.42 oz) TIKI LE: 10.5g (0.37 oz)	TIKI/TIKI LE/ TIKI GITD/ TIKI GITD BLUE	\$ <b>1</b>
IP66	Built-in rechargeable Li-ion battery	55.0mm (2.17")	14.7mm (0.58")	-	10.5g (0.37 oz)	TIKI UV	
IP54	Built-in rechargeable Li-ion battery		60.0mm x 24.5mm x 13.8mm (2.36" x 0.96" x 0.54")		26g (0.92 oz)	TIP SE	
IP67	Built-in rechargeable Li-ion battery	62.6mm (2.46") (Length)	26.9mm (1.06") (Width)	13.4mm (0.53") (Depth)	38.3g (1.35 oz)	TIP2	

NOTE: Runtime has been measured with the first battery type stated in battery options.

\* The runtime for Turbo/High mode is the testing result before starting temperature regulation.

				(	OUTPUT / RUNTIM	E			PEAK BEAM
IV	IODEL	LED	TURBO	HIGH	MID	LOW	ULTRALOW	BEAM DISTANCE	INTENSITY
es e		4 x CREE XP-	2500 Lumens	1100 Lumens	320 Lumens	90 Lumens	8 Lumens		
ame Serie	CI7	G3 S3	*30min	1h45min	4h15min	20h	130h	279m	19500cd
Cho		4 x Luminus SST-10-IR	-	7000mW	3000mW	1000mW	-		
		CREE XP-G2	-	135 Lumens	40 Lumens	10 Lumens	-		
	LA10	S3	-	1h30min	6h	23h	-	10m	28cd
			-	85 Lumens	30 Lumens	9 Lumens	-		
	LA10 CRI	Nichia 219B	_	1h30min	6h	23h	_	10m	25cd
					Warm Light				
			(Max)	_	_	_	(Min)		
			80 Lumens				15 Lumens		
			15h	-		-	45h		
			(Max)		White Light		(Min)		
Se	LR40	-	50 Lumens	-	-	-	15 Lumens	-	-
Serie			10h	-	-	-	38h		
ern (					Warm White Light	1			
Lantern Series			(Max) 100 Lumens	-	-	-	(Min) 10 Lumens		
_			8h	-	-	-	65h		
					Flashlight Mode				
	1070	2 x Luminus SST40	3000 Lumens	1000 Lumens	300 Lumens	35 Lumens	1 Lumen		23100cd
			-	10h	21h	100h	600h	300m	
	LR70				Lantern Mode				2310000
		20 x high CRI LEDs	-	400 Lumens	55 Lumens	5 Lumens	-		
		EEDS	-	7h	60h	200h	-		
			-	100 Lumens	40 Lumens	6 Lumens	(Candle Mode) 100-120 Lumens		
	Bubble	-	-	5h	10h	42h	5h	-	_
					Spotlight				
s			-	290 Lumens	-	125 Lumens	-		
erie			-	10h	-	15h	-		
NWL Series	NWL20	-			Floodlight			93m	1269cd
Ź			-	600 Lumens	260 Lumens	30 Lumens	-		
			-	6h	10h	78h	-		
		CREE XP-L HI	500 Lumens	-	-	-	1 Lumen		
es	GEM8	V3	*1h	-	-	-	500h	39m	380cd
GEM Series		Ultraviolet	Ultraviolet (TURBO)	-	-	-	Ultraviolet (ULTRALOW)		
GEN	GEM10UV	Ultraviolet 3000mW,	3000mW	-	_	-	5mW	-	_
		365nm	*4h15min	_	_	_	500h		

#### **PHOTO CREDITS**

南卡 鱼加y lock 京园 文凯森赛 数懒小姐姐 Vittorio\_Crobu
Jakub Kasprzak
\_\_call.me.v\_\_
Vaheed Abbasi
Lee McGrath
Vrg Fotografia
Will Godward

protechteus stanislavpetera hard\_task\_photo Eftihis Samolis batis\_film cunodebruin roldangilbuena its\_sa\_nam victorlaforteza gudao-wang Gelsomino Palladino Weerapat Kiatdumrong fotografianocturna.net

	BATTERY OPTIONS	DIMENSIONS					
WATERPROOF		LENGTH	HEAD DIAMETER	TAIL DIAMETER	WEIGHT	MODEL	
IP68	1x18650 / 2xCR123 / 2xRCR123	148.2mm (5.83")	40.0mm (1.57")	26.0mm (1.02")	158g (5.57 oz)	CI7	Chamele on Series
IPX6	1xAA	78.5mm (3.09")	22.6mm (0.89")	-	42.7g (1.51 oz)	LA10	
IPX6	1xAA	78.5mm (3.09")	22.6mm (0.89")	-	42.7g (1.51 oz)	LA10 CRI	
-	Built-in rechargeable Li-ion battery		117.0mm x 96.0mm x 96.0mm (4.61" x 3.78" x 3.78")		222g (7.83 oz)	LR40	Lantern Series
IP67	Built-in rechargeable Li-ion battery		113.0mm x 60.0mm x 34.0mm (4.45" x 2.36" x 1.34")		271g (9.56 oz)	LR70	
IPX4	3xAAA		ø72.0mm x 132.0mm (ø2.83" x 5.20")		106g (3.74 oz)	Bubble	
IPX5	1x21700		216.7mm x 50.0mm x 41.2mm (8.53" x 1.97" x 1.62")		153g (5.40 oz)	NWL20	NWL Series
IPX8	1×18650 / 2×CR123 / 2×RCR123	139mm (5.47")	9mm (0.35")	21.5mm (0.85")	57.7g (2.04 oz)	GEM8	ies
IPX8	1x18650 / 2xCR123 / 2xRCR123	135mm (5.31")	16mm (0.63")	21.5mm (0.85")	66.5g (2.35 oz)	GEM10UV	GEM Series

All images, text and statements specified herein this catalogue are for reference purpose only. Should any discrepancy occur between this catalogue and information specified on www.nitecore.com, information on our official website shall prevail. Sysmax Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.